

# ***FRIED CHICKEN***

**ONE-STOP COMMERCIAL  
KITCHEN SOLUTIONS**





# OUR COM PANY



Founded in 2002, Chefmax is located in Dongguan City, Guangdong Province. With more than 20 years of experience, we're dedicated to providing the best one-stop solution for all types of commercial kitchens.

Chefmax consists of 750 employees, including 18 R&D personnel, led by professionals with doctorate degrees, 30 experienced engineers, 440 skilled production personnel, 75 quality inspection personnel, 114 sales personnel, 64 after-sales instructors, and 9 talented designers. With our rich experience in automation product development, we're able to integrate product development and production in a better way.

Our products are well exported to Southeast Asia, East Asia, Africa, North America, Europe, Middle East, and many other countries and regions in the world. We have deployed experienced sellers and agents for different regions, and have established a complete after-sales system, ensuring professional and technical support.

Chefmax is committed to making commercial kitchens smart and easy globally.




# OUR DESIGN



From consultation, production to delivery and installation. Our one-stop solution help you to build your kitchen from scratch.



From consultation, production to delivery and installation. Our one-stop solution help you to build your kitchen from scratch.

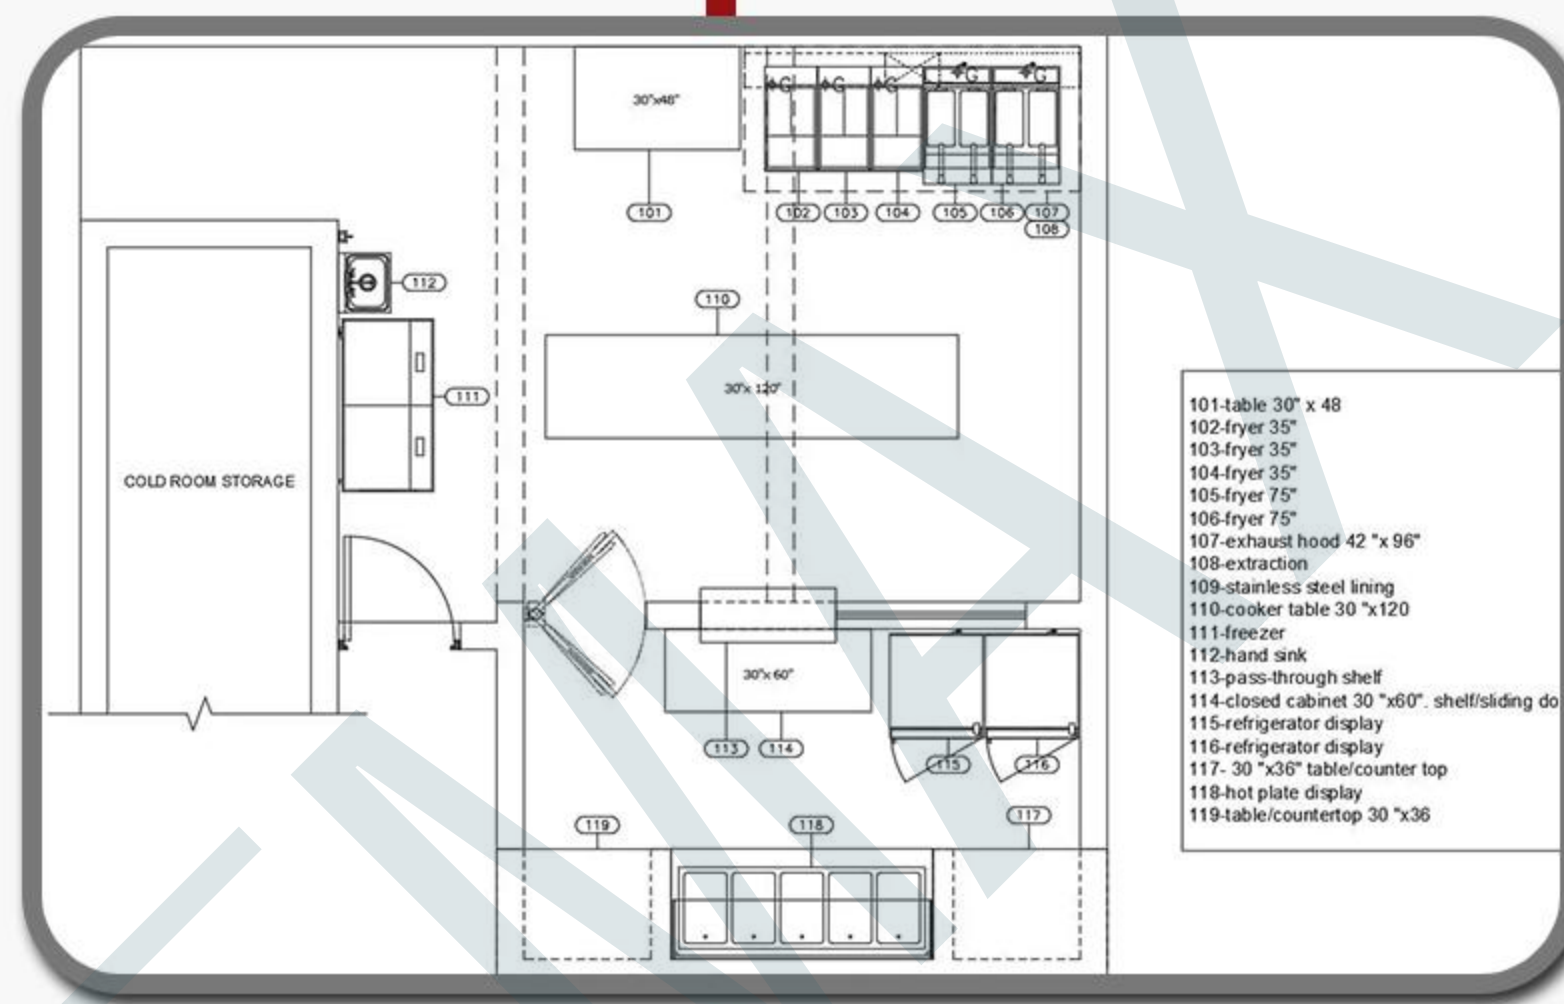

Our designers will consider local regulations, electrical and plumbing factors, and ventilation of the equipment to design a one-stop drawing. Your customized CAD drawings will be ready in a few days.



Personalized Equipment List



Equipment Customization



Provide CAD design






*Fried Chicken One Stop*

# SCENE DISPLAY


Let's take a look at a practical scenario for a fried chicken one-stop-shop

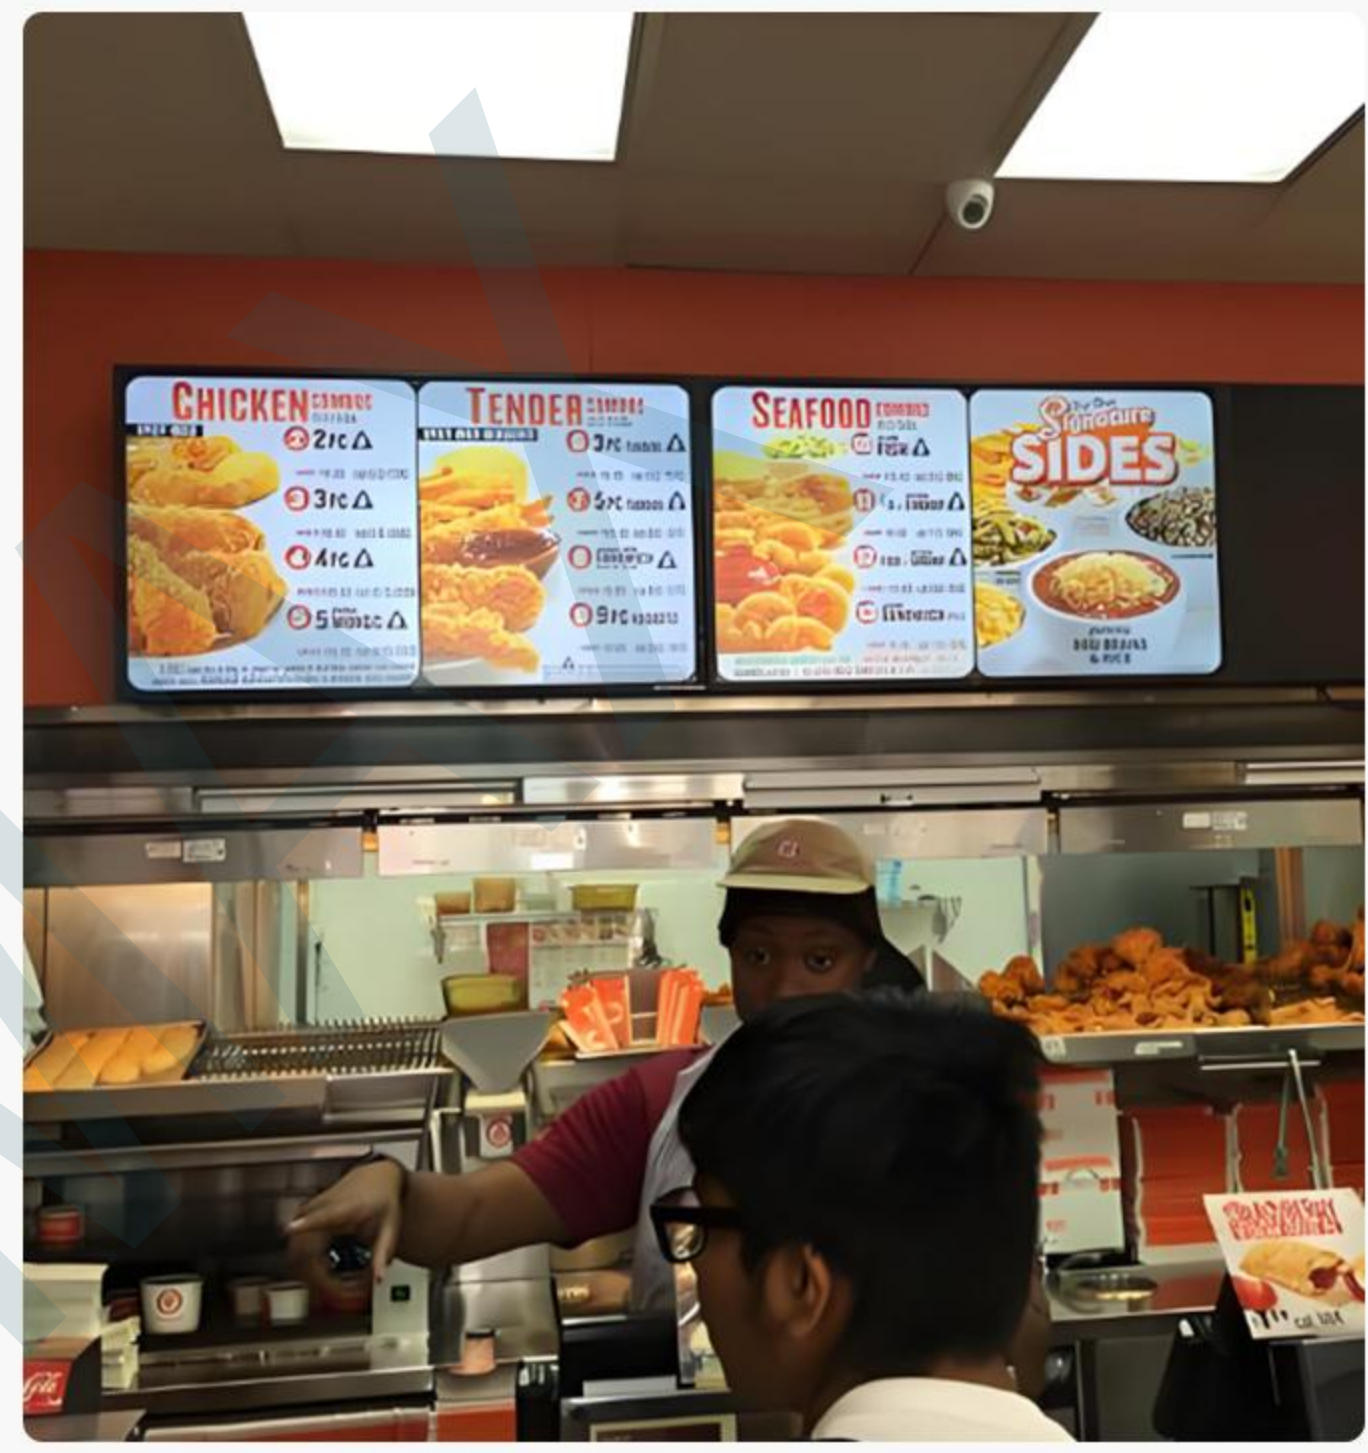



# CATALOGS

One-stop Commercial Kitchen Solutions  
For Fried Chicken Shop

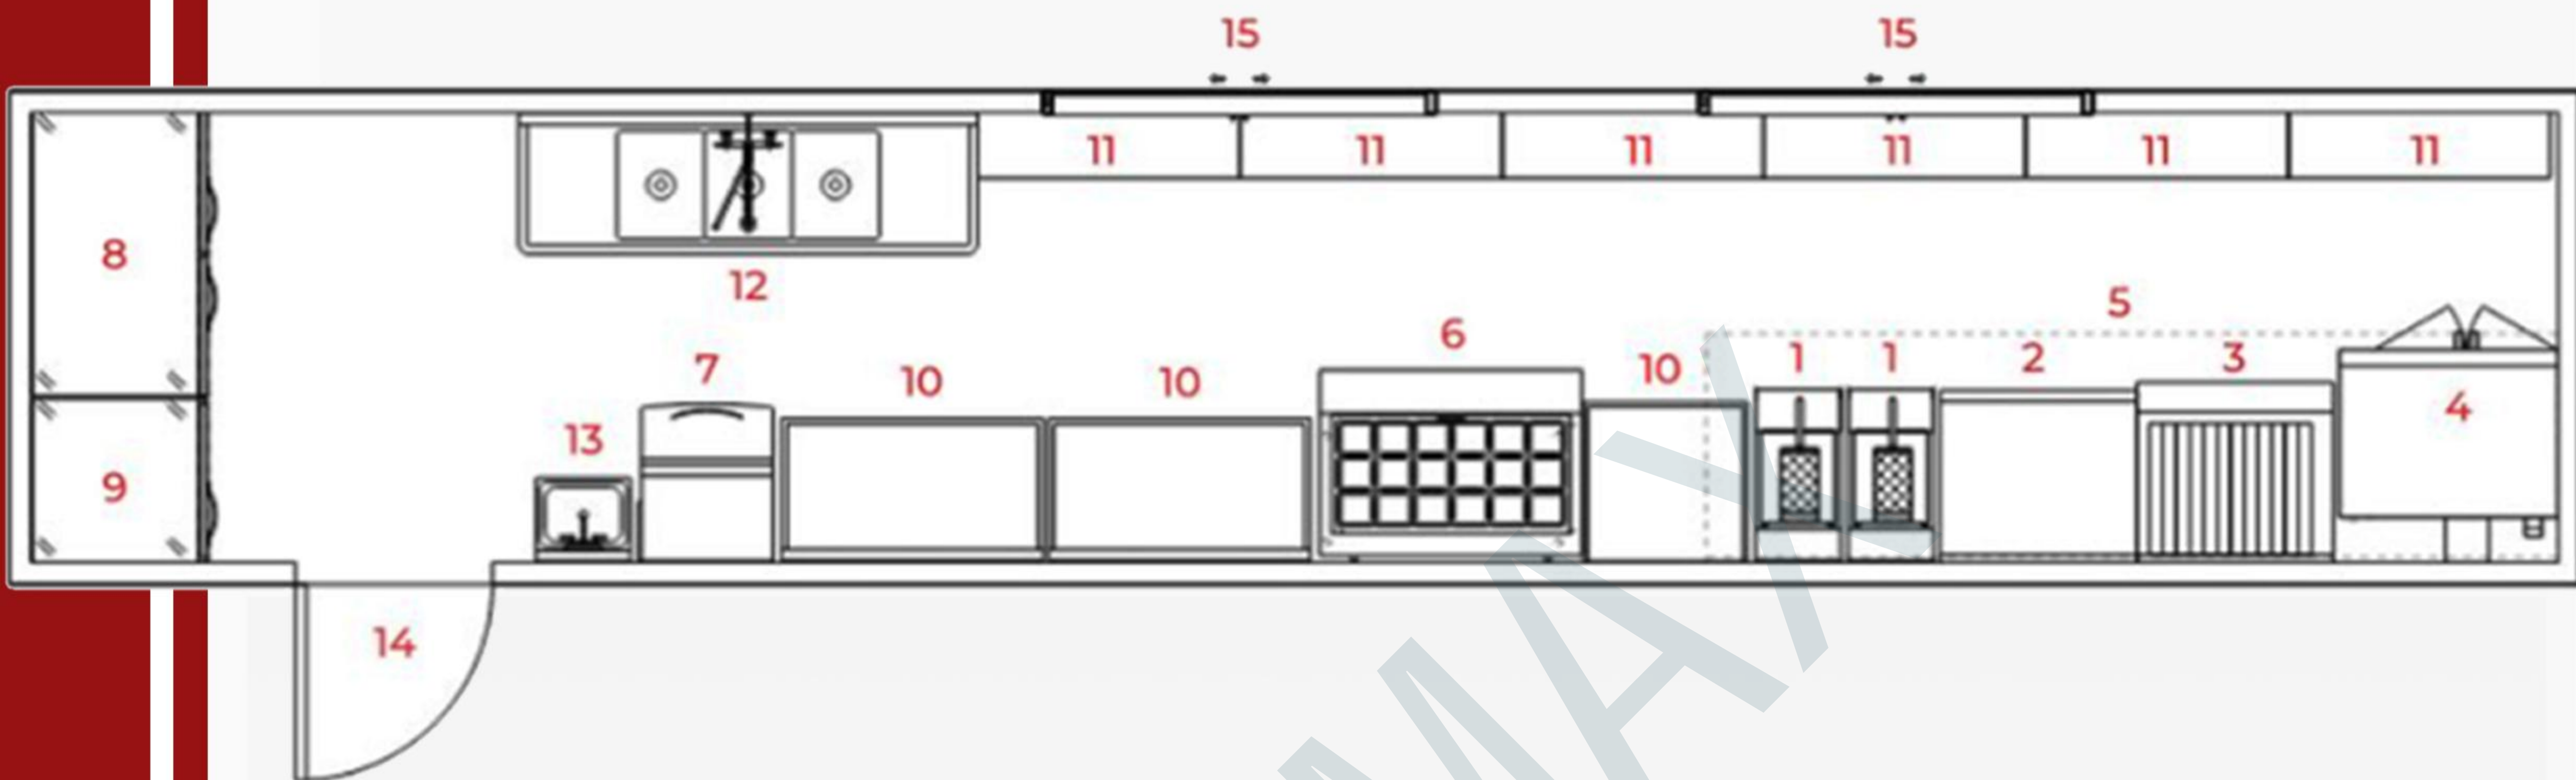

Cooking Area .....	1-5
Saved Area .....	6-9
Processing Zone .....	10-11
Health District .....	12-14
Other Accessories .....	15-20
About Us .....	






## Inexpensive

The built-in oil filtering system not only saves the space, but also ensures that the fried food maintains high-quality outcome, while also greatly extending the service life of the oil and reducing operating costs.



## Intelligent

Computer board control, up to 24 menu storage capabilities, arbitrary call \*

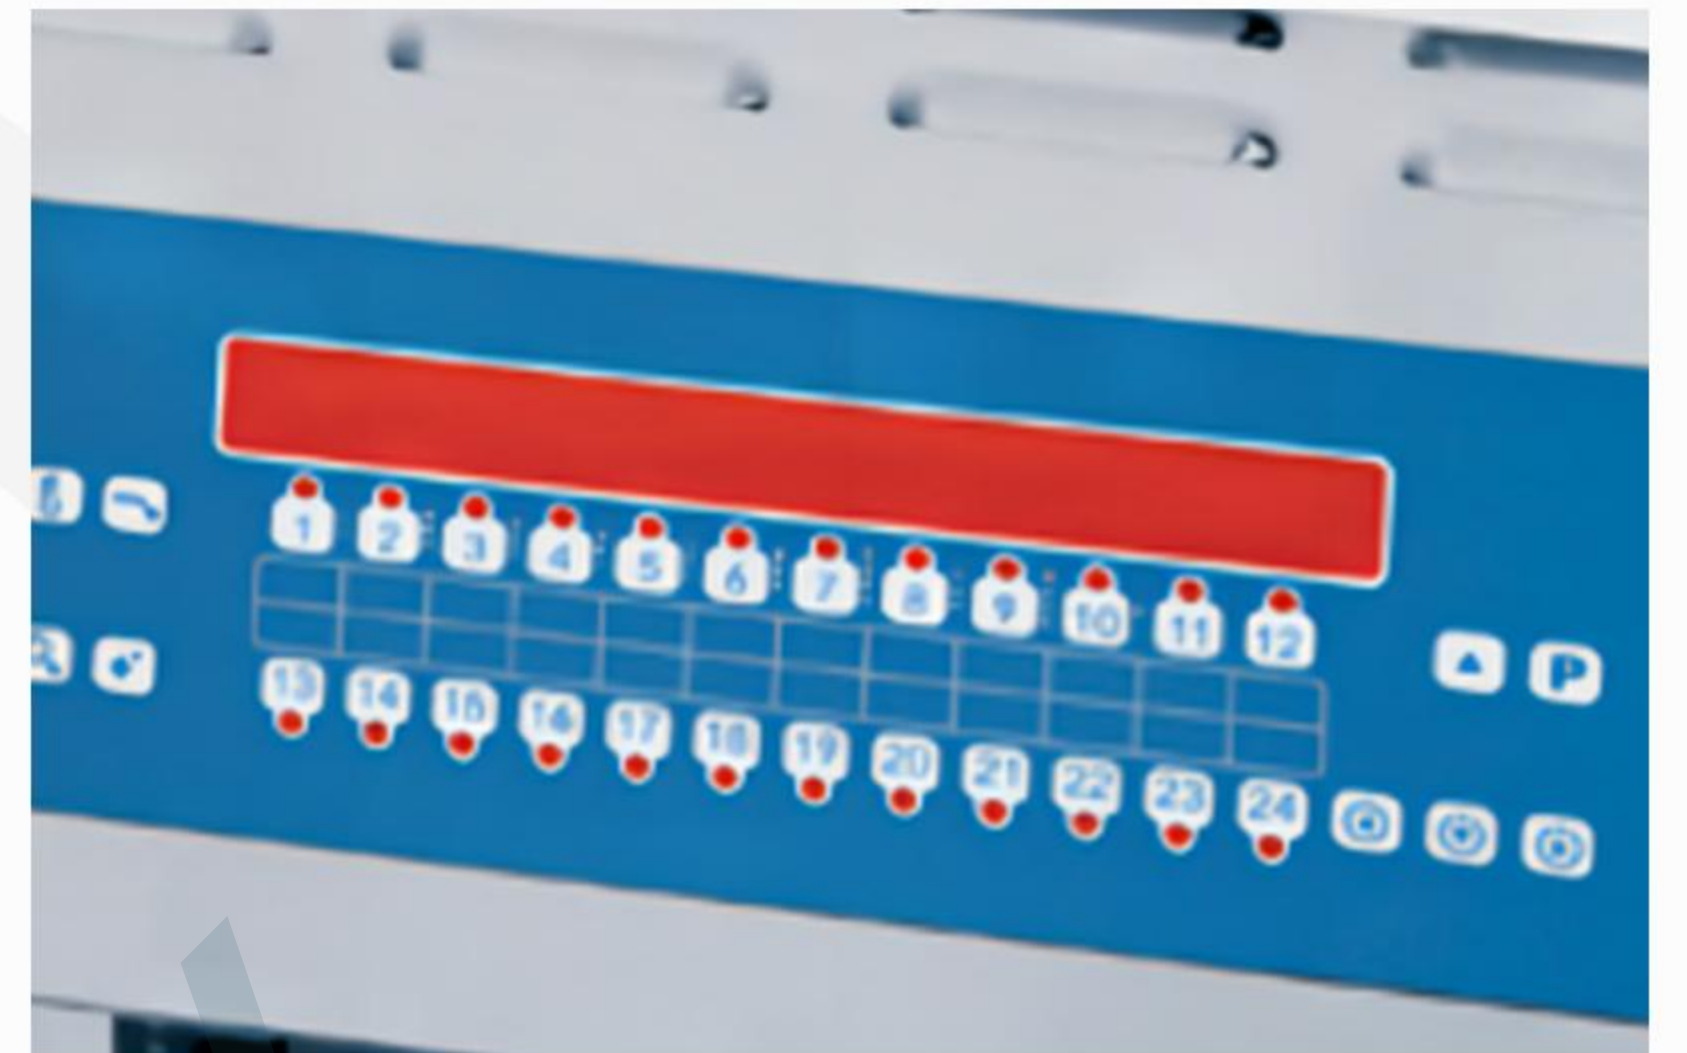

## Energy-saving

Flat-bar heating element transfers heat more efficiently.



## Deep cylinder Cooling oil

The trapezoidal structure at the bottom forms a cold oil area to precipitate food residues. This avoids food carbonization making the oil black and bitter, and reduces oil change times.



high temperature oil area


oil-freezing zone

sedimentation of oil residue





# Gas Standing Type Deep Fryer

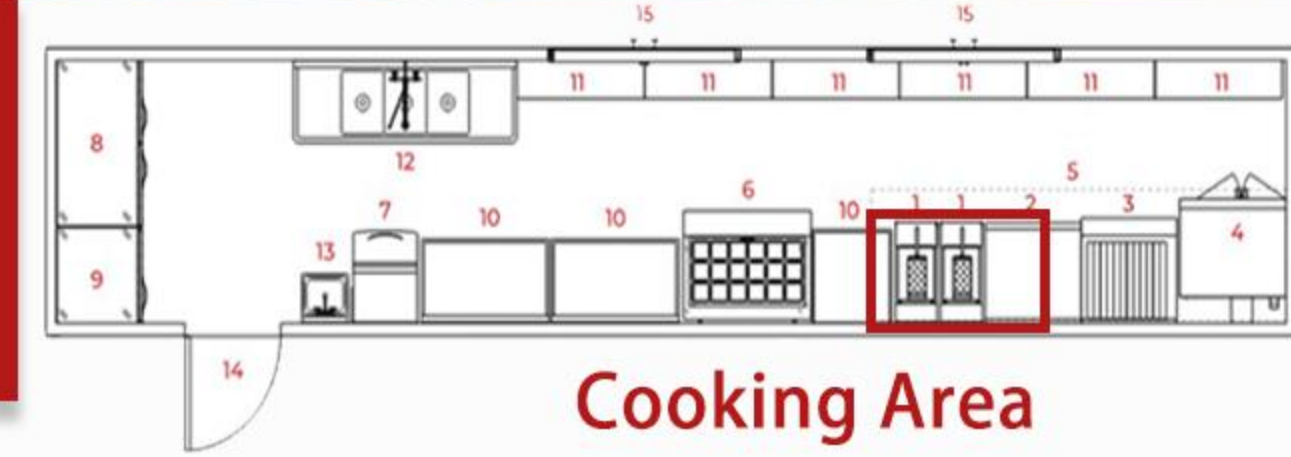

CM-HFRF-90



CM-DF-32



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial

Model	CM-HFRF-90	CM-HFRF-120	CM-HFRF-150	CM-GF-2G	CM-GF-23G
Dimension(mm)	394*759*1195	394*759*1195	533*759*1195	396*702*1088	396*702*1088
Capacity(L)	18.5 - 23	21.3 - 25	31 - 37	30	35
Power	90000BTU/h	120000BTU/h	150000BTU/h	55000BTU/h	82000BTU/h
Quantity of Tube Burners	3	4	5	2	3




Improve kitchen efficiency, Dealing with peak meals 8L cylinder frying reduces the oil change frequency, reduces the time required for waste oil treatment, and reduces the operating cost.





# Gas Countertop Type Deep Fryer

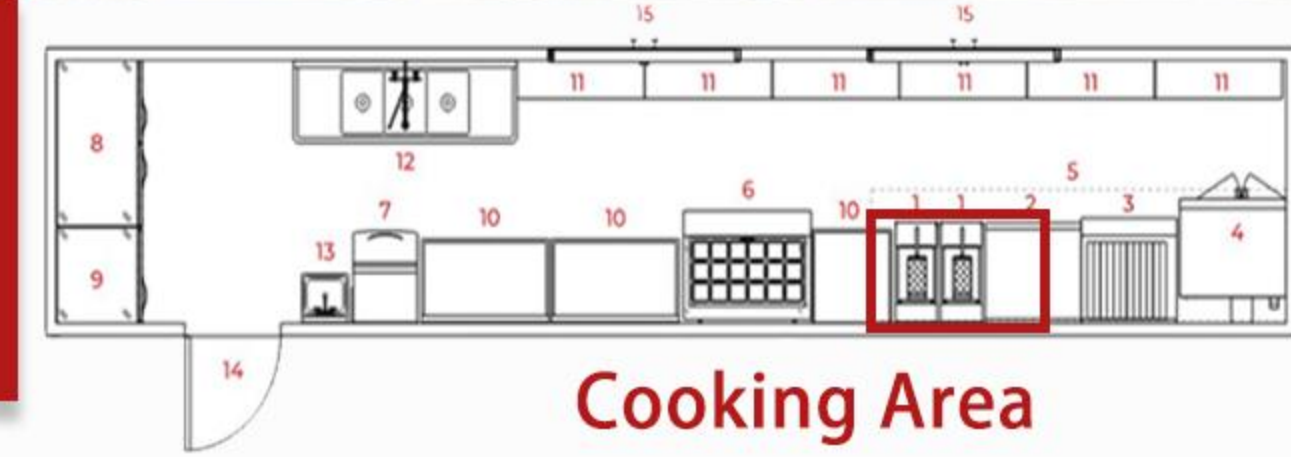

CM-NTT10E



CM-GF-72A



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial

Model	CM-GF-500	CM-GF-5G	CM-GF-71A	CM-GF-72A	CM-GF-71	CM-GF-72
Dimension(mm)	500*580*520	500*645*970	400*650*480	600*650*480	290*520*460	580*520*460
Capacity(L)	17	36	14	14	6	6
Power	6KW	58004BTU/h	17500BTU/h	35000BTU/h	/	/
Function	temperature control	temperature control	temperature control	temperature control	/	/
Vat	1	1	1	2	1	2




Compact and flexible modular solutions,  
Make full use of every inch of space

On Cabinet It can be superimposed on the  
base to improve the space utilization, which  
conforms to the ergonomic design.





# Electric Standing Type Deep Fryer

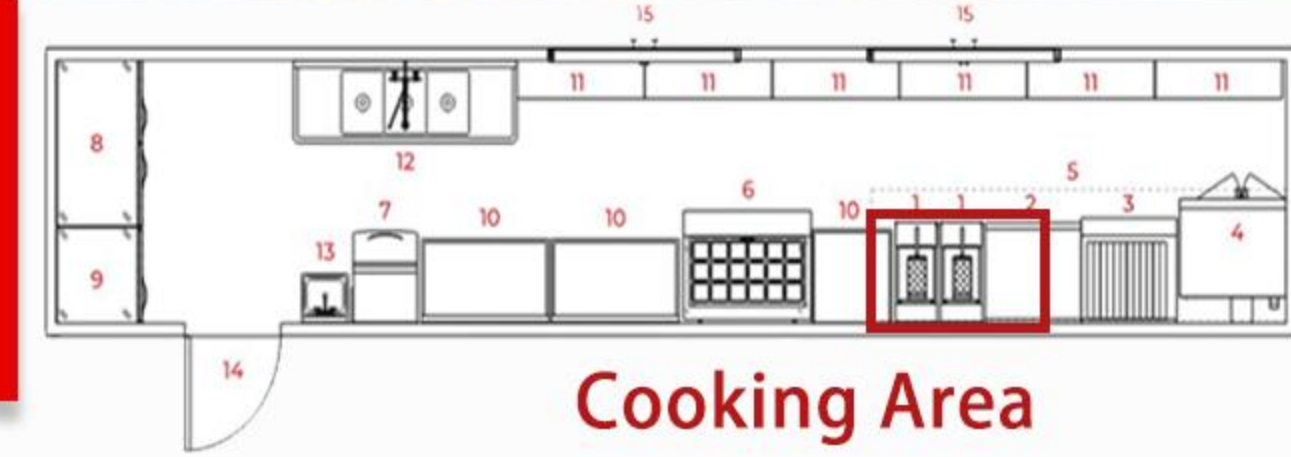

CM-DF-32



CM-DF-26-2A



Water and oil resistant



Thickened material



Heat-resistant




Easy cleaning



Powerful antibacterial

Model	CM-NTP14EF	CM-NTP14ES	CM-NTP184-3EF	CM-DF-26	CM-DF-26-2A	CM-YDZL-9-1S
Dimension(mm)	355*420*120	443*797*1143	1521*797*1143	400*800*1125	800*800*1125	400*830*1120
Capacity(L)	30	15L x2	37.8L x3	28L	28L x2	24L
Voltage & Frequency	14kW 380-415V3N, 220-240N 3- 50/60hz	7kw*2 380-415V 3N, 220-240V3-50/60hz	17kW x3 380-415V3N, 220-240V3-50/60hz	9kw3N-380V 50/60hz	9+9kW 3N-380V 50/60hz	9KW/220V, 380V 50/60hz
CTL	computer	computer	computer	knob control	computer with timer	computer with timer
Optional	filtration system	filtration system	filtration system	/	/	automatic lifting
Vat	1	2	3	1	2	1

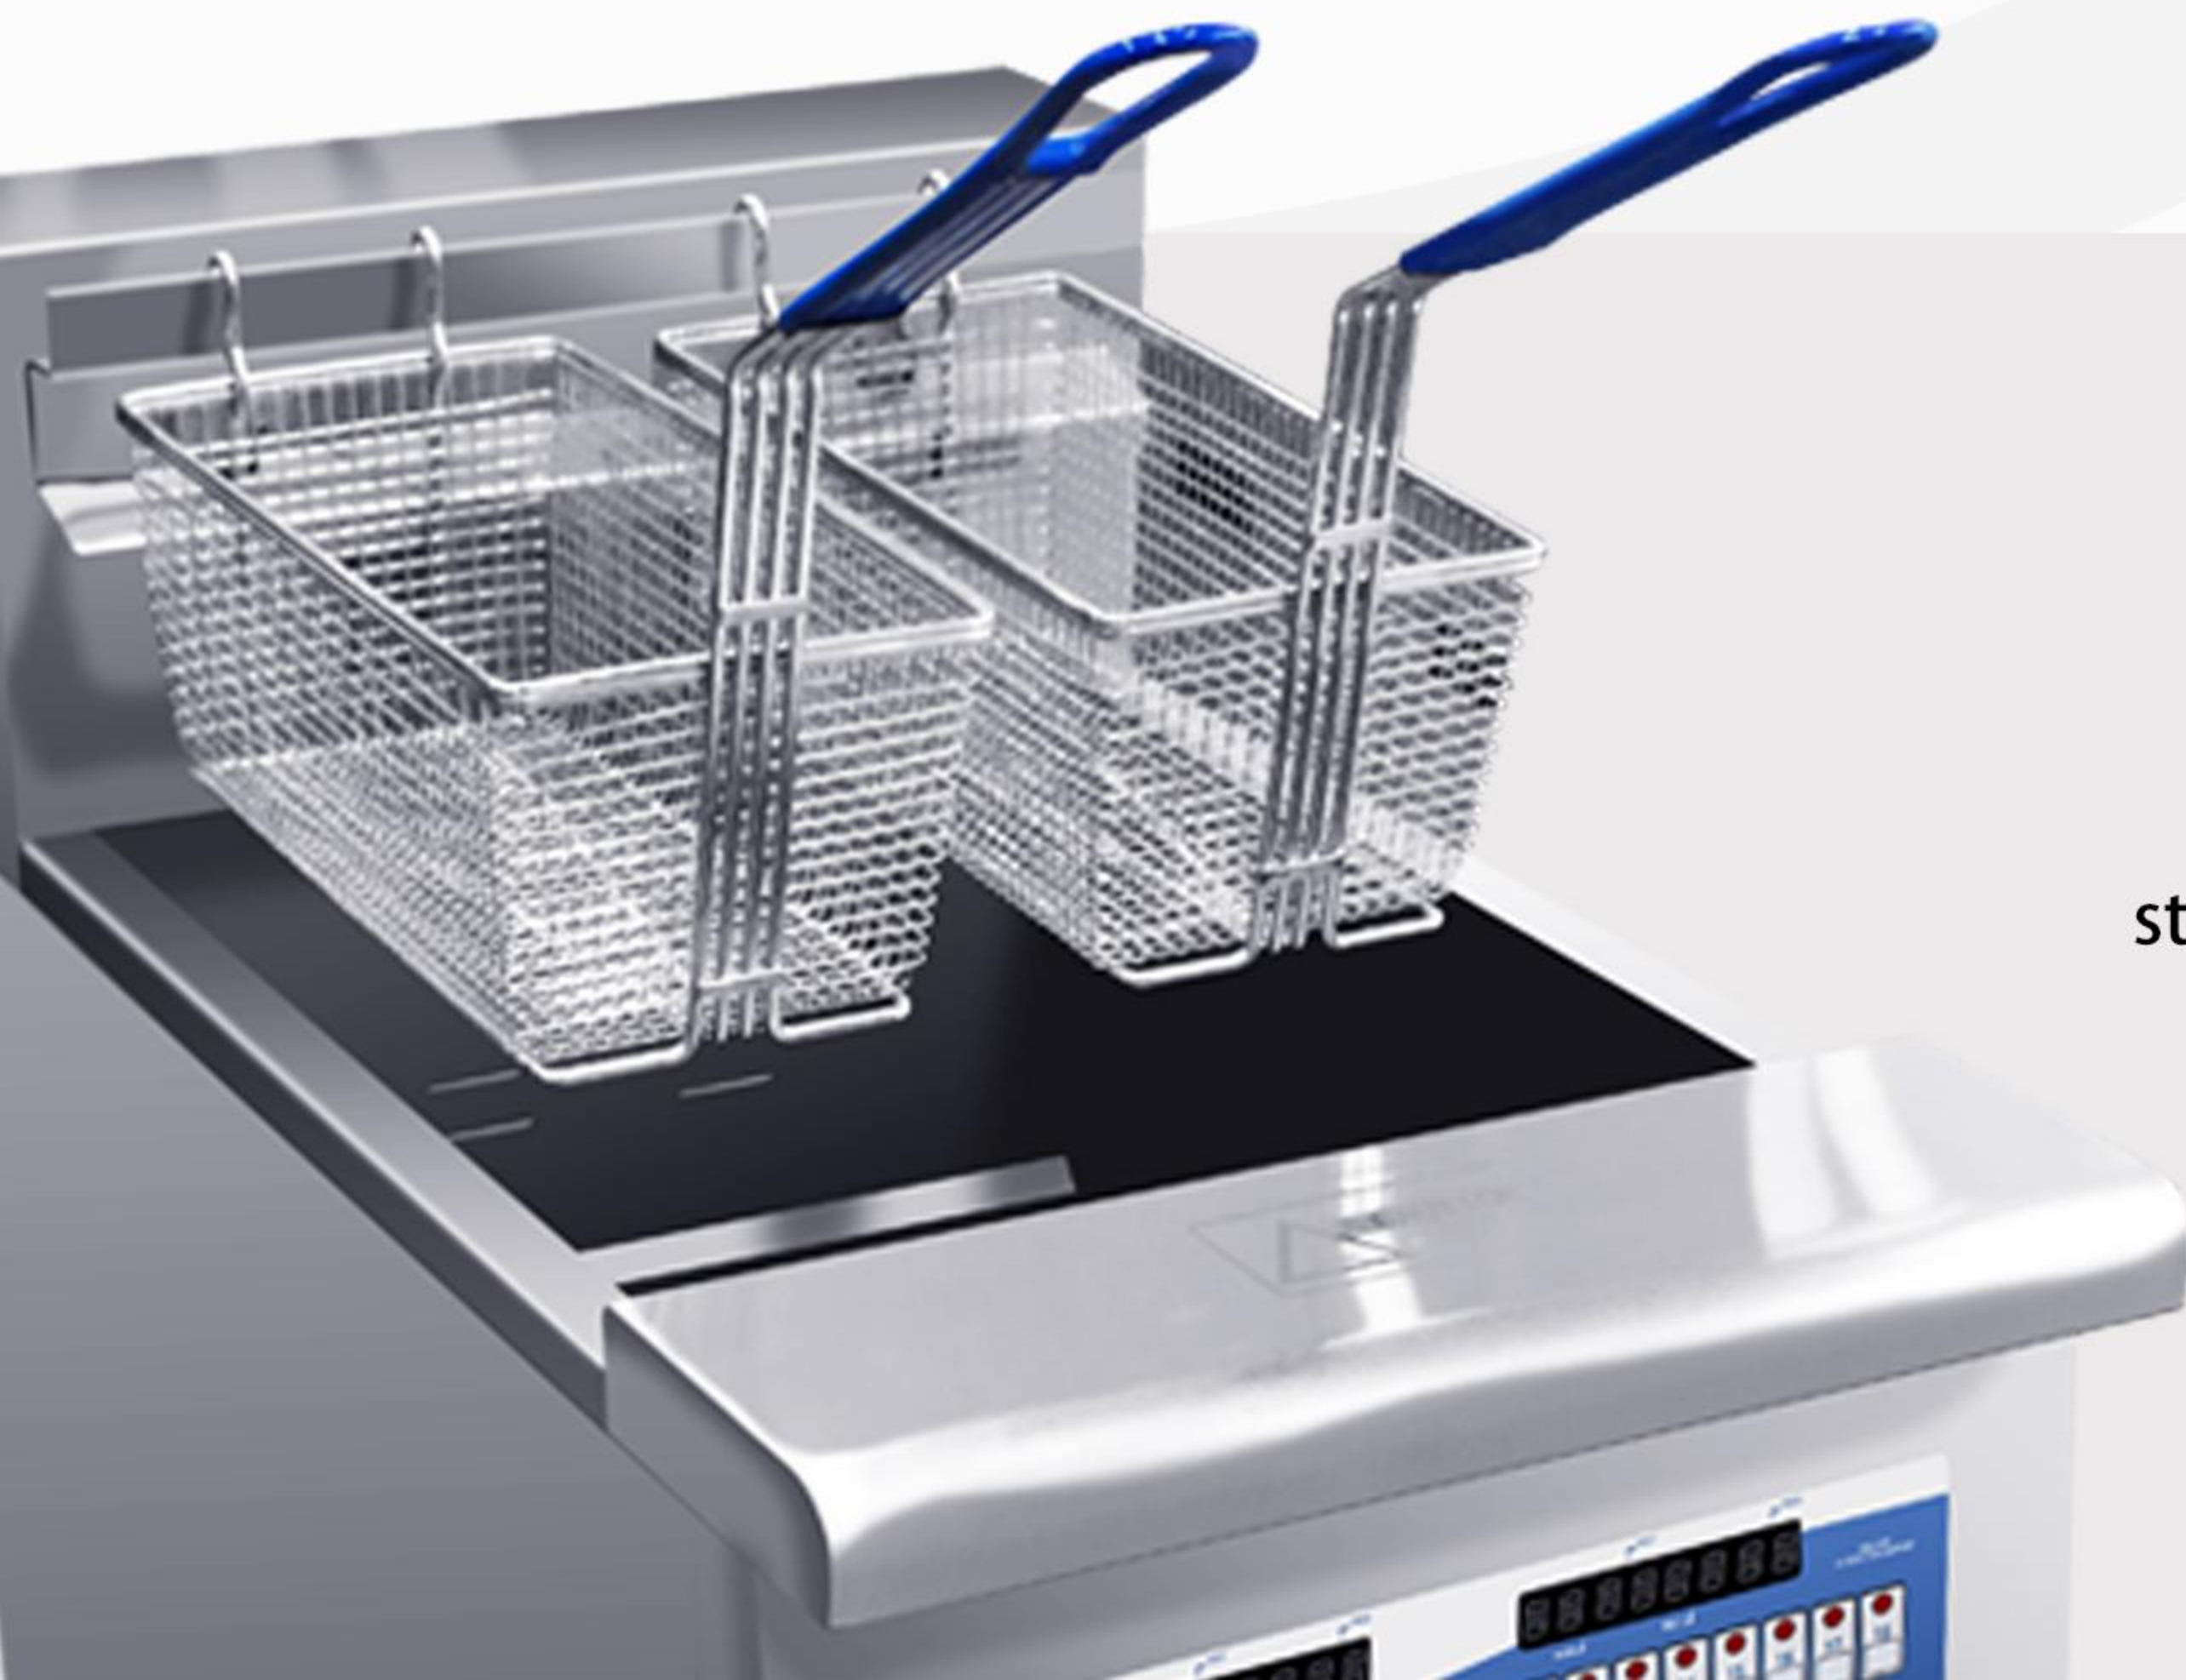


High sensitive probe Uniform blasting effect  
 High oil temperature detection sensitivity,  
 stainless steel heating tube, uniform oil temperature  
 system, accurate temperature control.






# Pressure Fryers

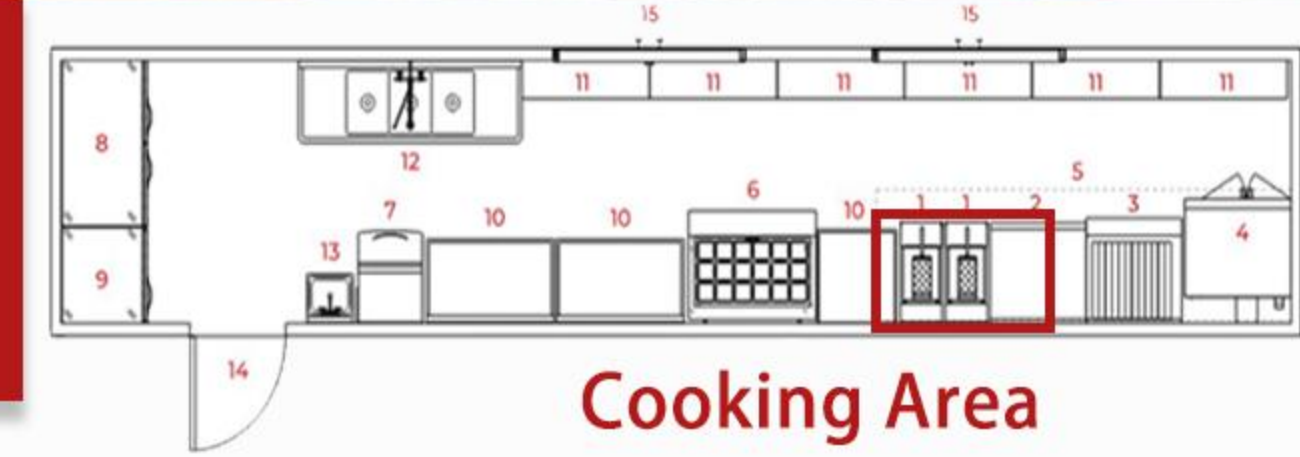

CM-PFE-800



CM-PFE-500

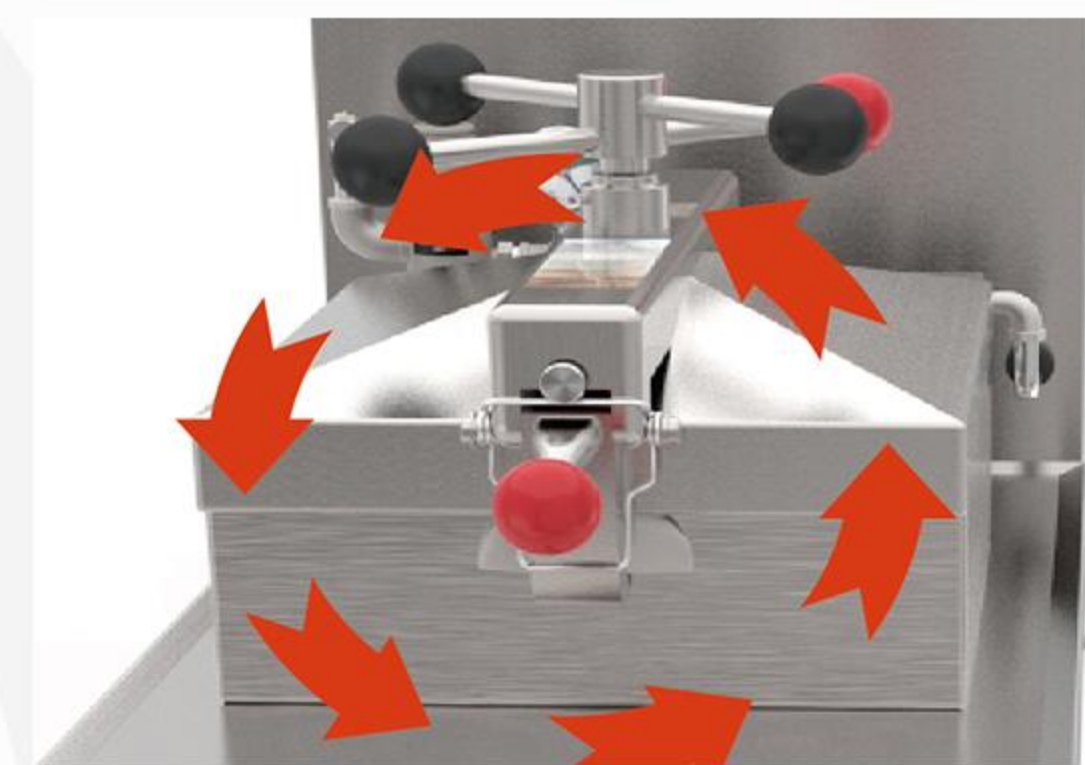

Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial

Model	CM-MDXZ-24	CM-OFE-126L	CM-PFE-800	CM-PFE-600L	CM-MDXZ-16	CM-MDXZ-22
Dimension(mm)	460*960*1230	430*780*1160	460*960*1230	460*960*1230	520*397*500	527*475*565
Capacity (L)	24	26	24	24	16	22
Voltage & Frequency	12kw 3N~380V/50Hz	14kw 3N~380V/50Hz	13.5kw 3N~380V/50Hz	13.5kw 3N~380V/50Hz	3kw 220V/50Hz	3.5kw 220V/50Hz
CTL	mechanical panel control	touchscreen computer panel	micro computer panel	LCD Panel	mechanical al control	mechanical panel control
Temp Range	roomtemp-200°C(392°F)	roomtemp-200°C(392°F)	roomtemp-200°C(392°F)	roomtemp-200°C(392°F)	roomtemp-200°C(392°F)	roomtemp-200°C(392°F)
Vat	1	1/2/3	1	1	1	1
Heating method	standing type	standing type	standing type	standing type	countertop	countertop



This series of chicken pressure fryer adopts the principle of low temperature and high pressure, the fried food is crispy on the outside and tender on the inside, which can reduce the cooking temperature and shorten the cooking time. The computer control panel, automatically controls the pressure and exhaust.




## Two-way opening

Equipped with glass doors at the front and back, convenient for kitchen placement and counter pickup, optimizing kitchen work efficiency and quickly processing orders during peak dining periods.



## Increase food appeal

Warm lighting makes food look fresh and delicious, helps customers make choices quickly, and improves their shopping experience.

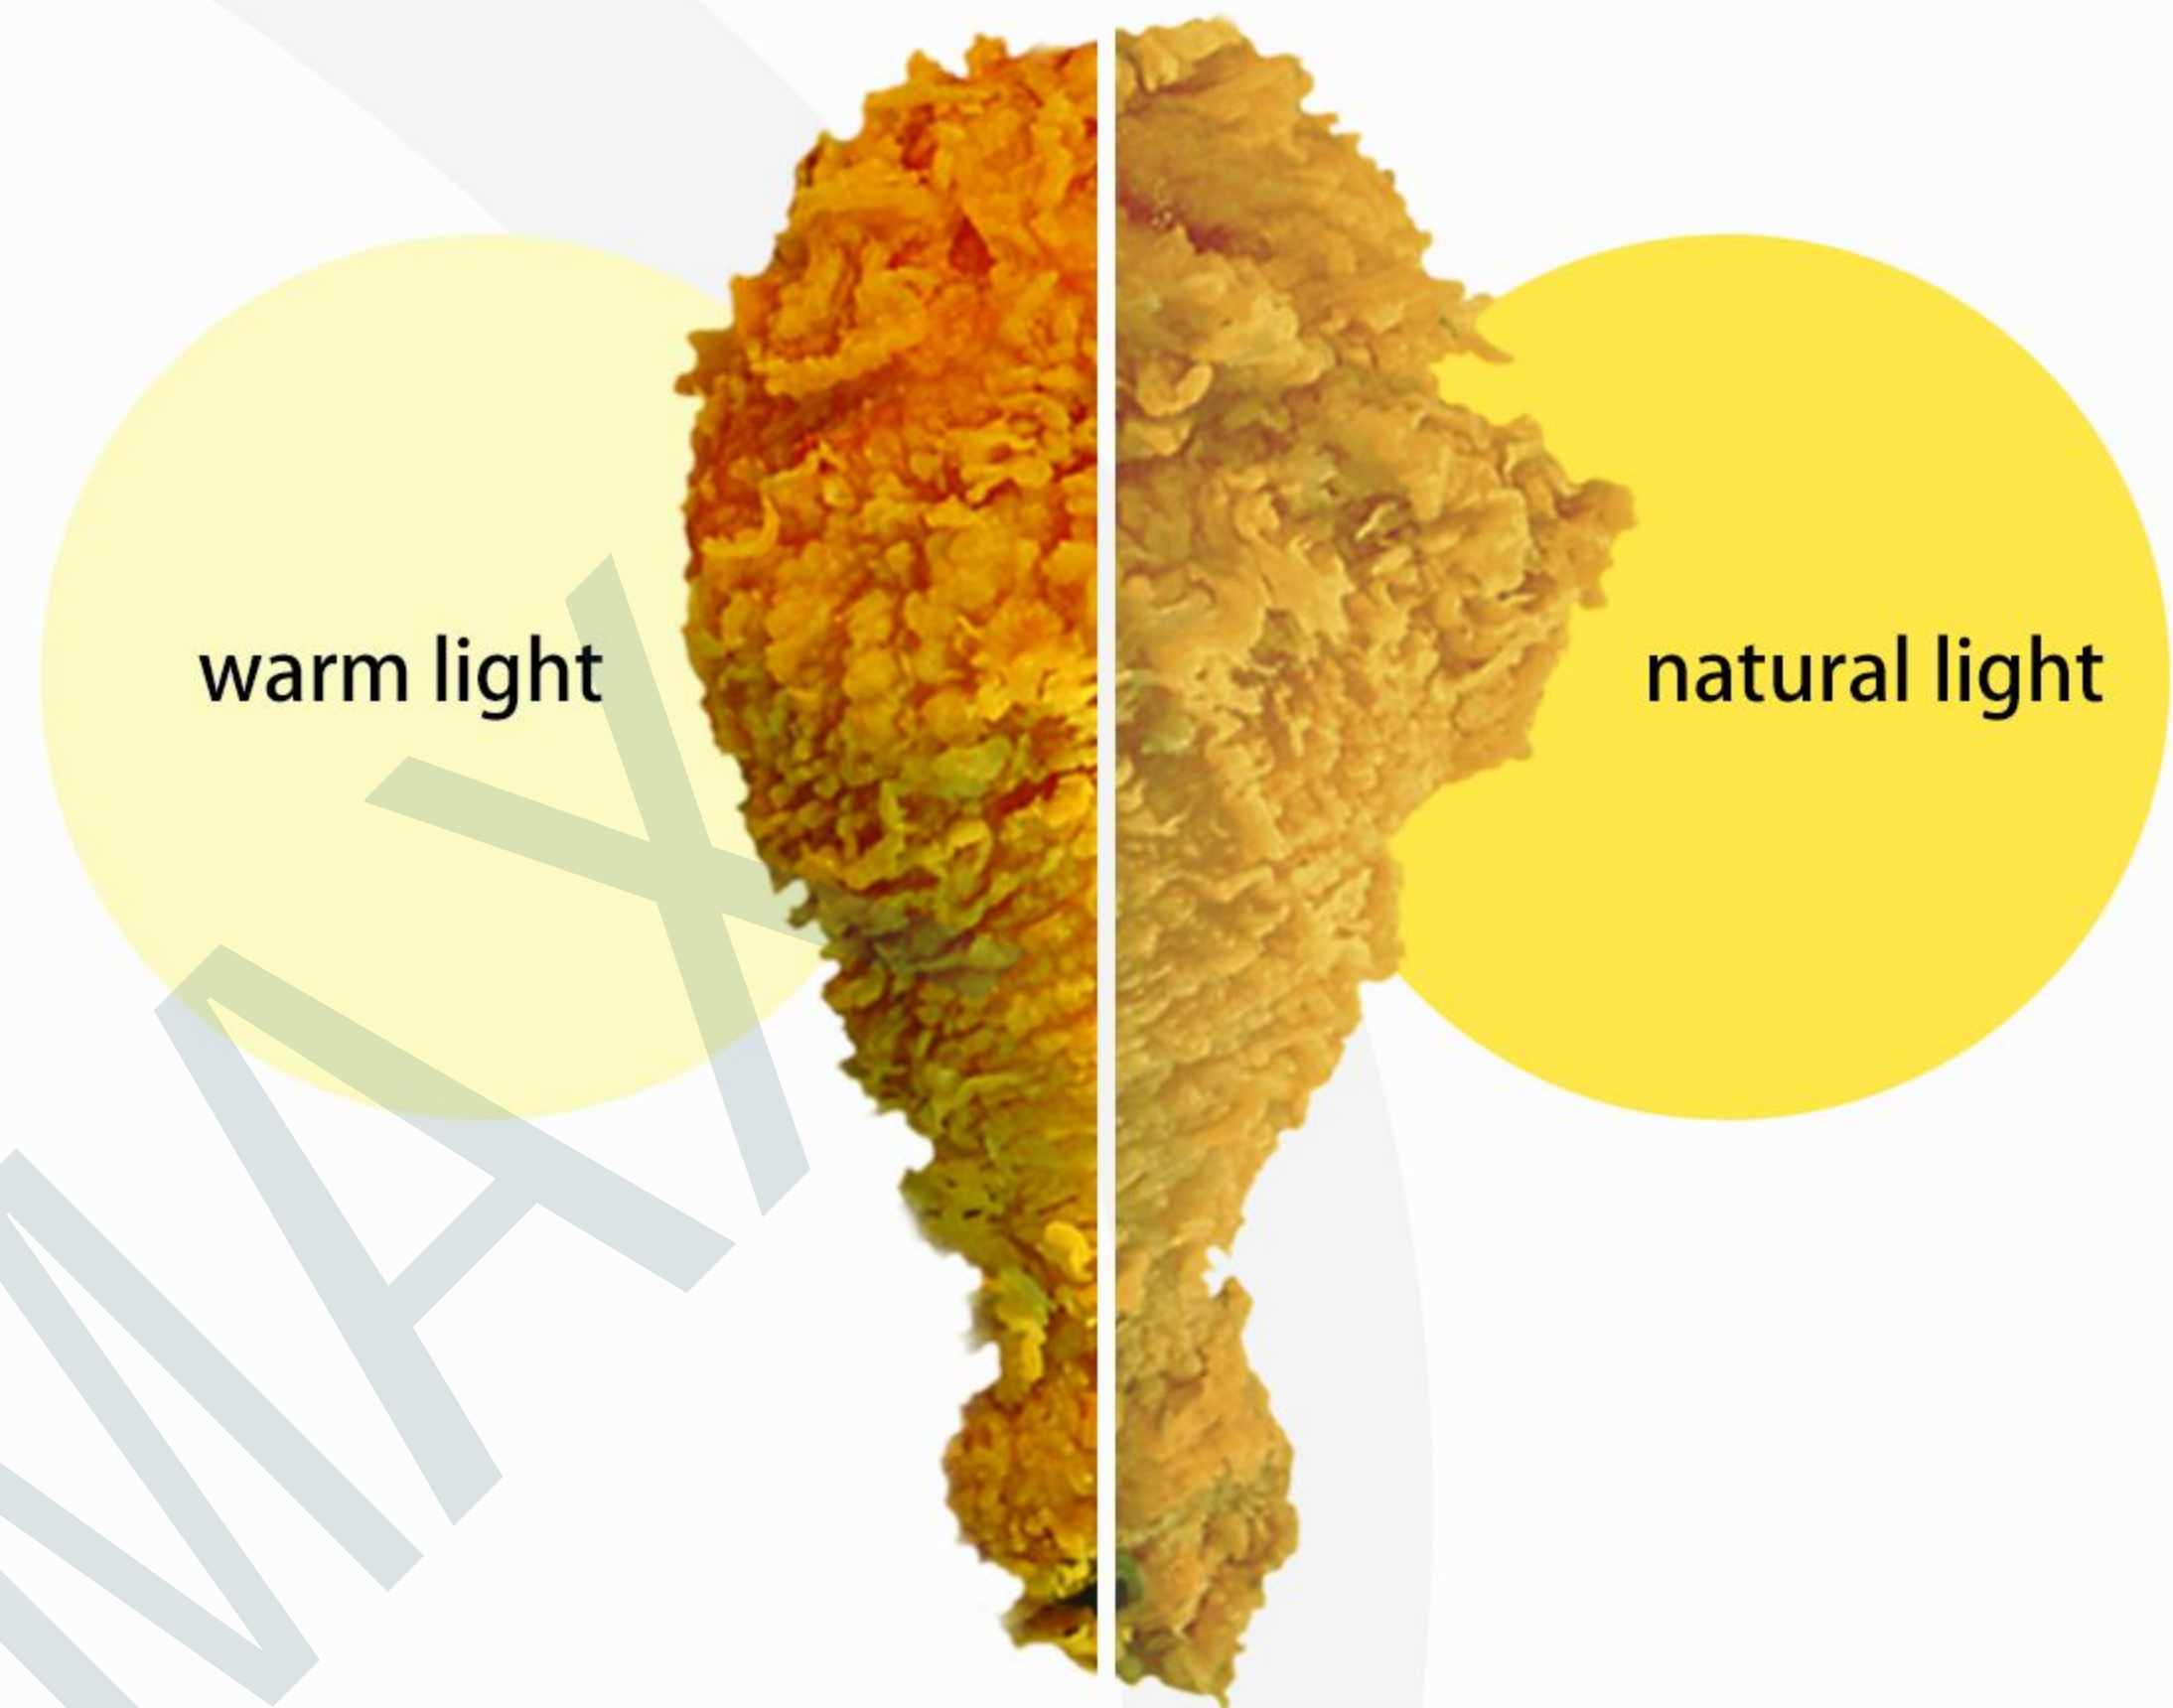

## Food pass area

With Central Island Work Cabinet



## Single layer control temp. & humidity

Different foods have different requirements for temp. and humidity: The crispy food can be kept crisp and the wet food can be kept juicy.

### Food Requiring Dry Environment

Fried Chicken	🌡️ 79~85°C	💧 10%
French Fries	🌡️ 74~79°C	💧 10~20%


### Food Requiring Humid Environment

Hamburger	🌡️ 74°C	💧 45~50%
Rice	🌡️ 60~71°C	💧 65~80%






# Holding Cabinet

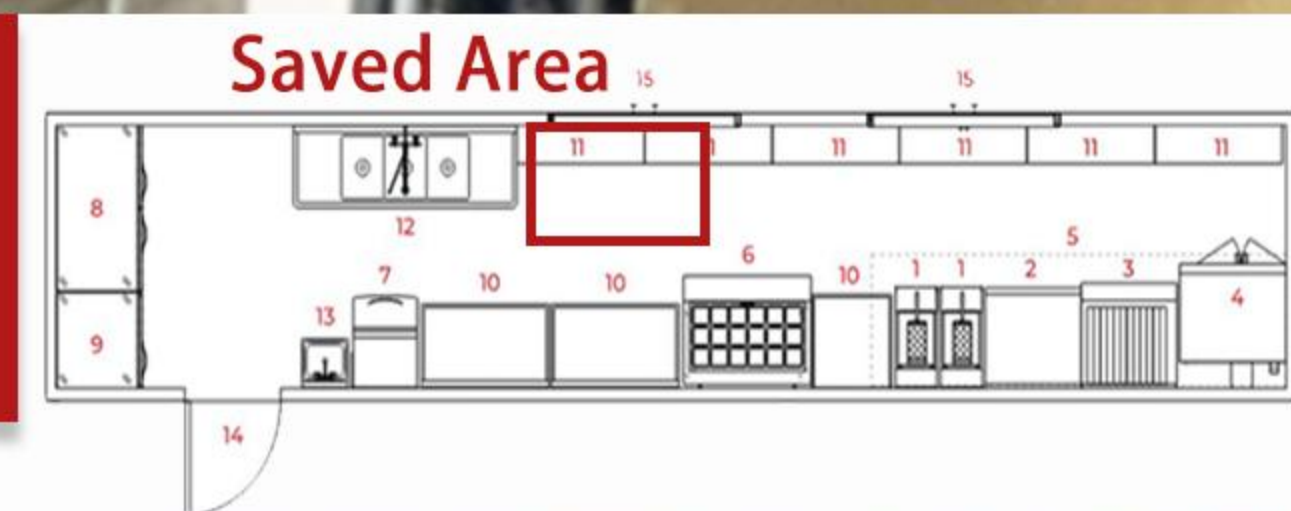

CM-UFC-F



CM-HFC-P

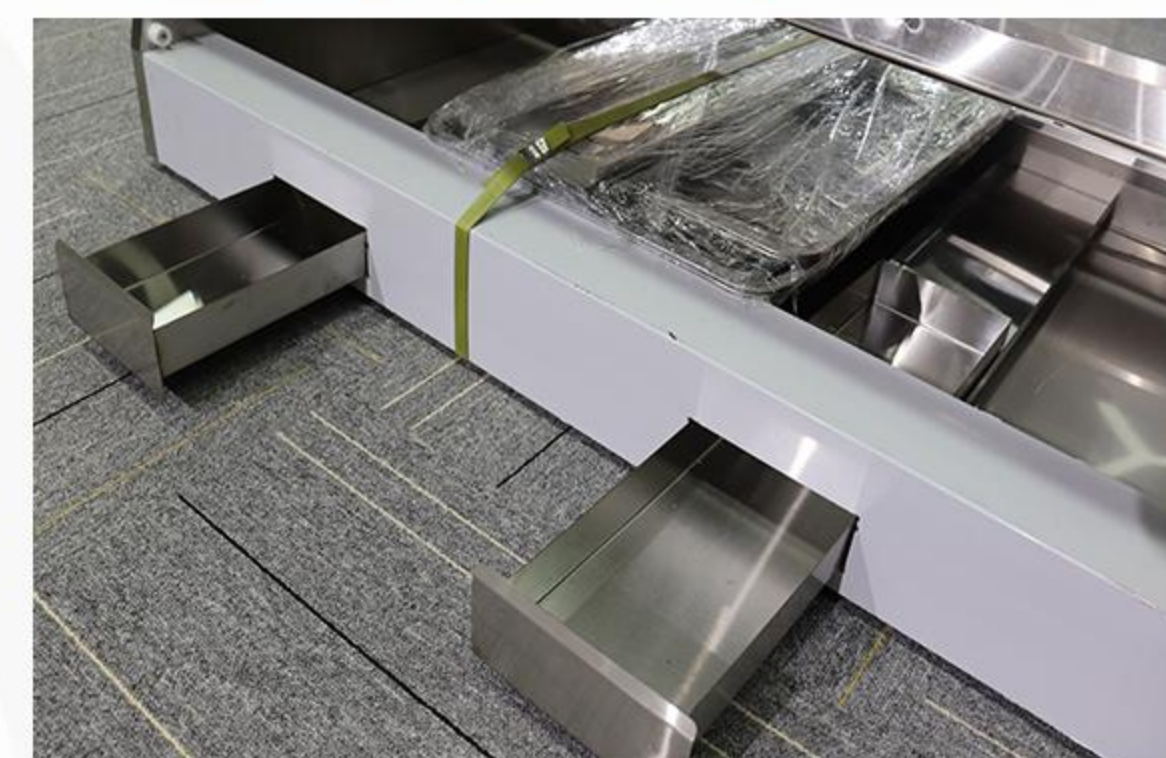

Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial

Model	CM-12KD	CM-15KD	CM-18KD	CM-UFC-F	CM-HFC-F	CM-EconHold-HF
Dimension(mm)	1200*750*840	1500*750*840	1800*750*840	636*805*1854	636*805*990	636*805*901
Number/PAN Of Layers	4	6	8	14	4	4
Voltage & Frequency	2.8KW 220V50hz	2.8KW 220V50hz	3.85KW 220V50hz	2.2KW 220-240v,120V~	1.1KW 220-240v, 120V~	1.1KW 220-240V~
Pan Size	50x40cm*2pcs 60x40cm*2pcs	50x40cm*3pcs 60x40cm*3pcs	50x40cm*4pcs 60x40cm*4pcs	530x325X65 (1/1GNP)	530x325X65 (1/1GNP)	530x325X65 (1/1GNP)
Optional	knob control	knob control	knob control	electronic temperature control	electronic temperature control	mechanical temperature control




A good warmer can keep the heat evenly in the food, a great warmer can keep the food in perfect taste with certain temperature after 30 minutes.

Warm and soft light  
Make the chips look fresh and golden.






# Standing Fridge&Freezer

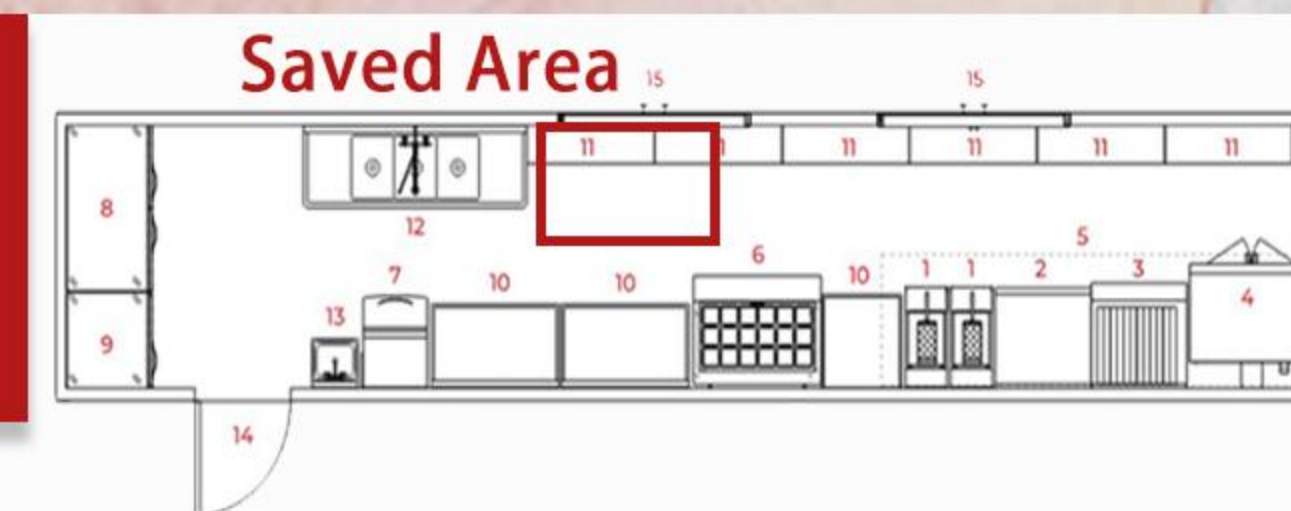

CM-JN-LF050C2



CM-JN-LF100C4

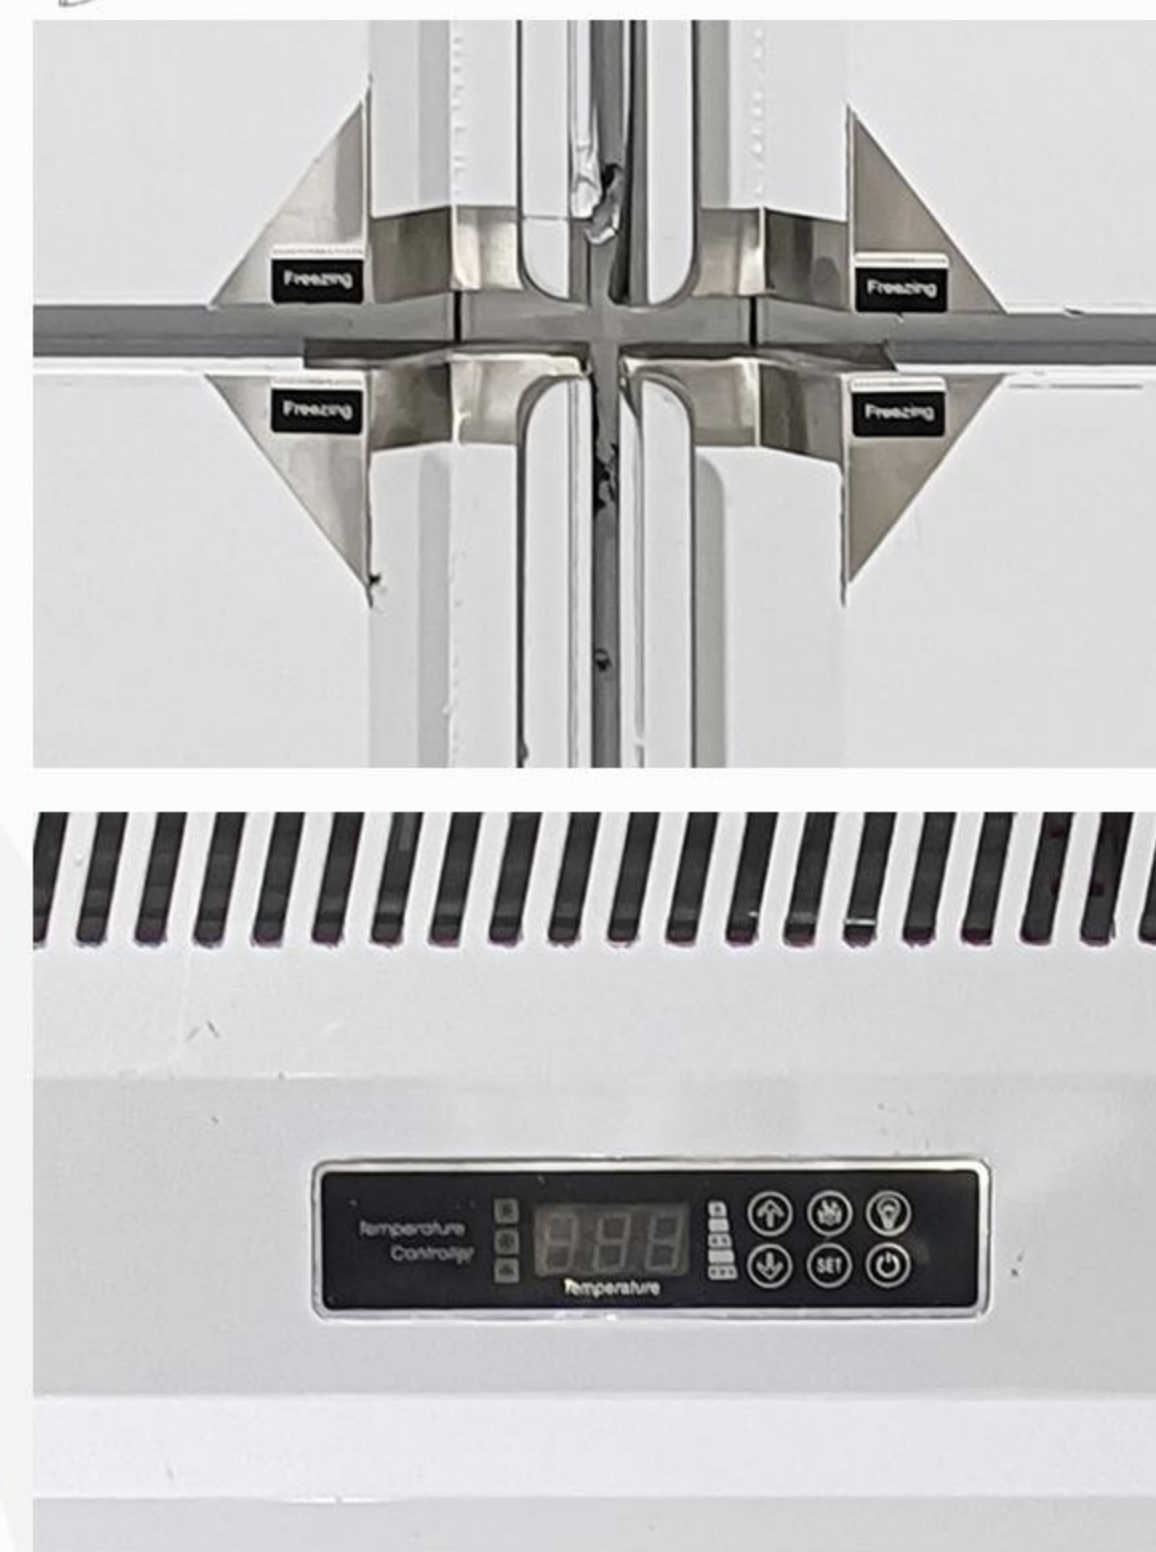

Water and oil resistant



Thickened material



Heat-resistant




Easy cleaning



Powerful antibacterial

Model	CM-JN-LF050C2	CM-JN-LF050D2	CM-JN-LF100C4	CM-JN-LF100D4	CM-JN-LF150C6	CM-JN-LF150D6
Dimension(mm)	620*760*1980	620*760*1980	1220*760*1980	1220*760*1980	1820*760*1980	1820*760*1980
Refrigeraton	air cooling	air cooling	air cooling	air cooling	air cooling	air cooling
Voltage & Frequency	0.39KW 220v 50hz/60hz	0.54KW 220v 50hz/60hz	0.42KW 220v 50hz/60hz	0.82KW 220v 50hz/60hz	0.69kw 220v 50hz/60hz	0.82kw 220v 50hz/60hz
Net capacity	410L	410L	900L	900L	1558L	1558L
Refrigerant	r290	r290	r290	r290	r290	r290
Temperature	0°C~5°C	-12°C~-18°C	0°C~5°C	-12°C~-18°C	0°C~5°C	-12°C~-18°C

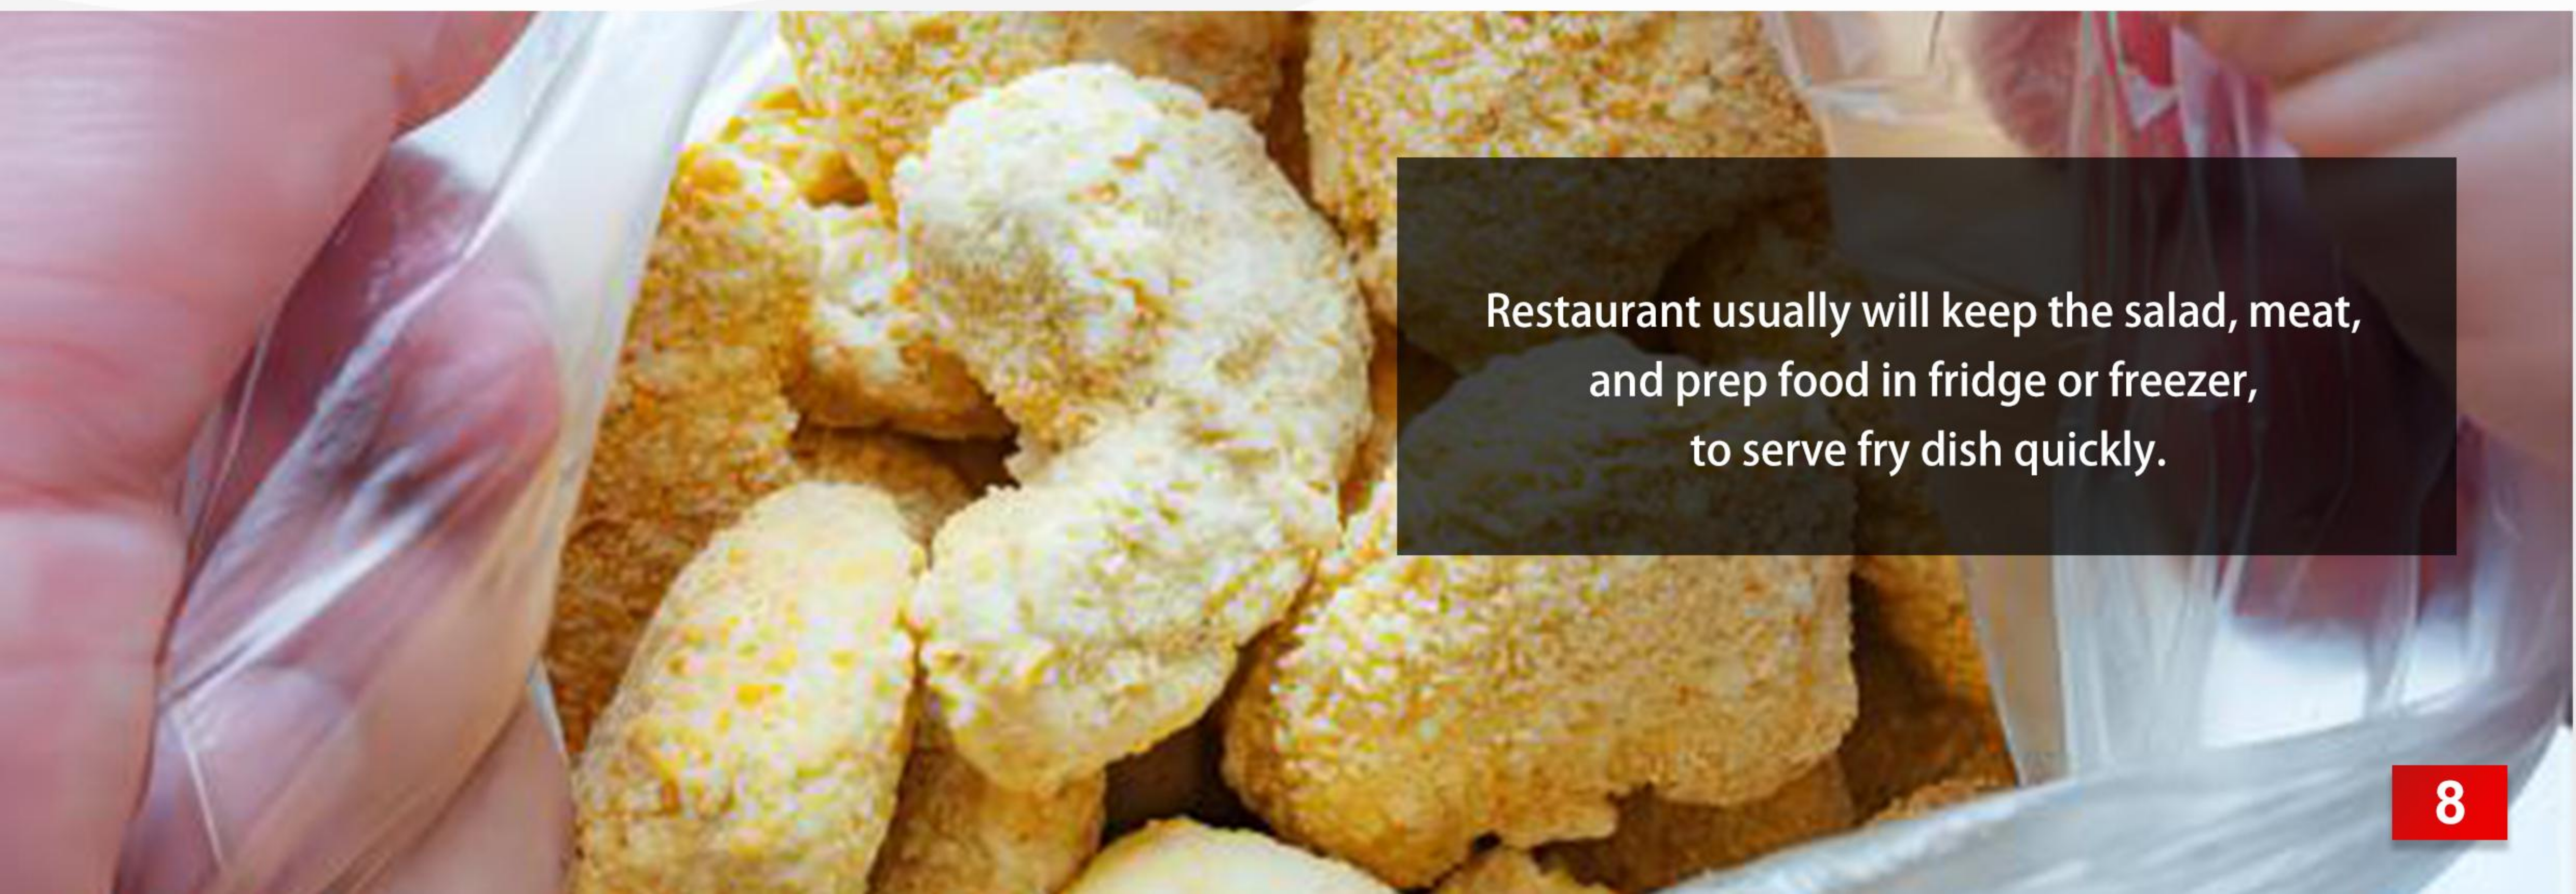

Restaurant usually will keep the salad, meat, and prep food in fridge or freezer, to serve fry dish quickly.






# Worktable Refrigeration



CM-JN-WF040C2



CM-JN-WF030C-6D

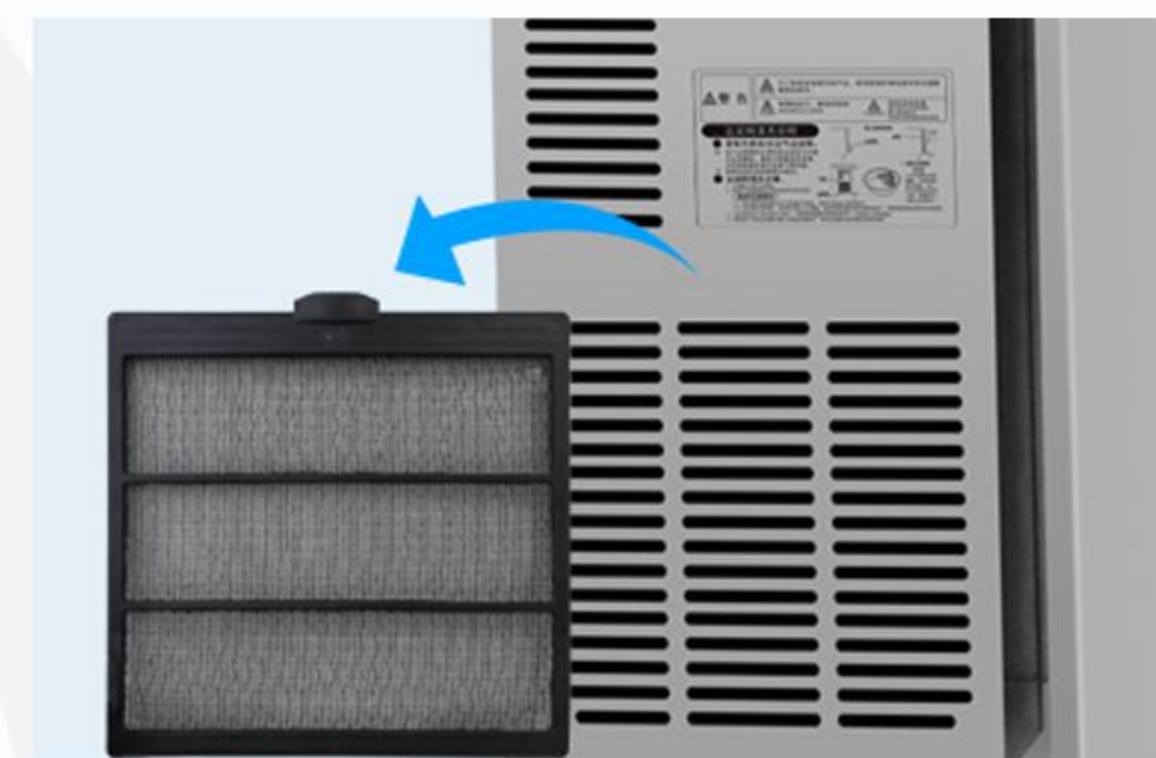

Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial

Model	CM-JN-SL1200F2	CM-JN-WF1500C2-PZ	CM-JN-PZ1800F3-G	CM-JN-TZ1475C-SL	CM-JN-SL1365C3-PZ/GR
Dimension(mm)	1200*760*1080	1500*800*1000	1800*800*1000	1475*395*425	1365*700*990
Refrigeraton	air cooling	air cooling	straight cooling	air cooling	air cooling
Voltage & Frequency	0.32kw 220v50hz	0.42kw 220v50hz	0.61kw 220v50hz	0.28kw	0.36kw 220v50hz
Cover	acrylic cover	stainless steel cover	glass cover	glass cover	marble top
Refrigerant	r290	r290	r290	r290	r290
Temperature	0°C~5°C	0°C~5°C	0°C~5°C	0°C~5°C	2°C~8°C




## Features

1. Stainless steel machine, durable
2. Precise electronic temperature control
3. Thickened foam layer, effective heat insulation and cold insulation.





# Breading Table Series

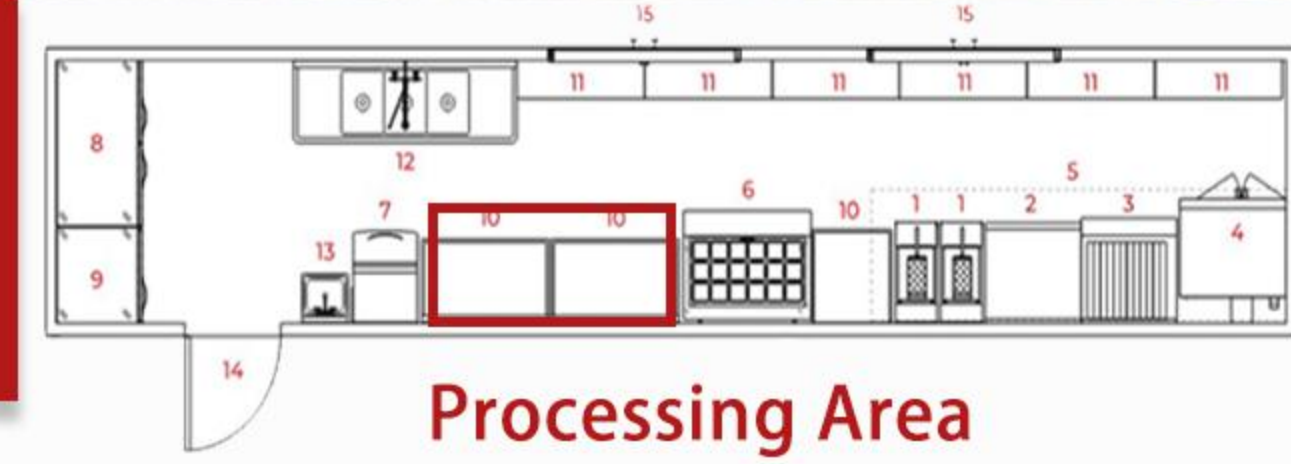

CM-GF800



CM-BTS12



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial

Model	CM-GF800	CM-GF1000
Dimension(mm)	800*640*950	1000*640*950
Capacity	~10L	~18L




Food (chicken nuggets) marinated for mixed powder frying, so that the food in the basin through the automatic vibration tank, excess powder automatically fall off, to keep the food (chicken nuggets) uniform thickness, but to achieve a delicious taste and enhance the appetite. Suitable for:Fast food, western food, Chinese food, canteen





# Breading Table Series

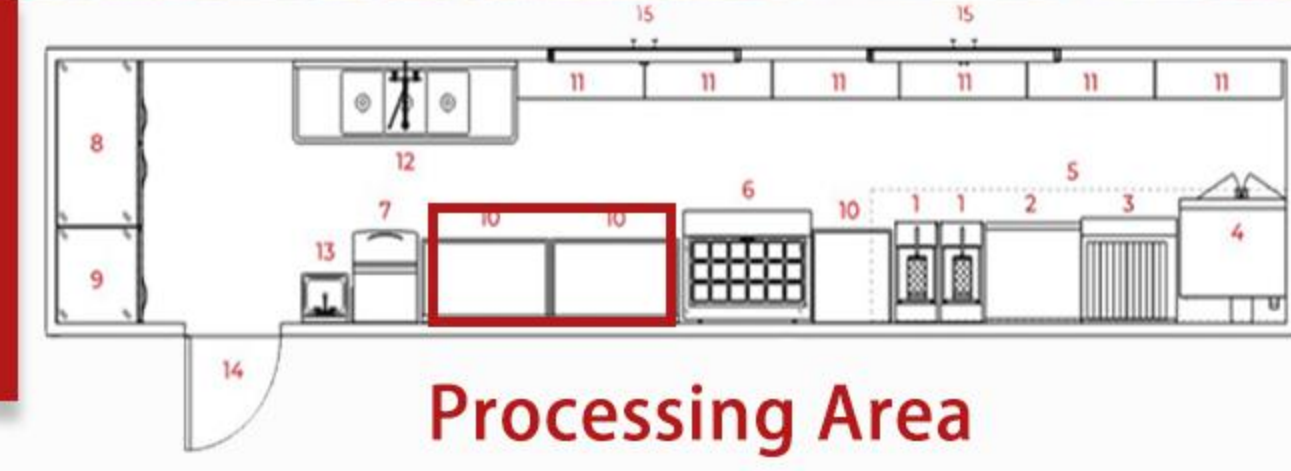

CM-FPS-500P



CM-FPS-100P



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning




Powerful antibacterial

Model	CM-FPS-80P	CM-FPS-100P	CM-FPS-175P	CM-FPS-210P	CM-FPS-450P	CM-FPS-500P
Dimension(mm)	500*450*840	500*450*840	660*675*950	660*675*950	560*850*1590	760*850*1680
Refrigerator	air cooling	air cooling	air cooling	air cooling	water cooling	water cooling/ air cooling
Voltage & Frequency	220V/240W	220V/330W	220V/750W	220V/800W	220V/990W	220V/1240W
Net capacity	60	80	120	140	250	300
Refrigerant	R134A	R134A	R404A	R404A	R404A	R404A
Ice plate	5*9=45	5*12=60	5*18=90	6*18=108	13*14=182	13*18=234





An enough capacity ice maker is important for a restaurant, a well frozen ice which melting time is long and able to keep its coldness after served.



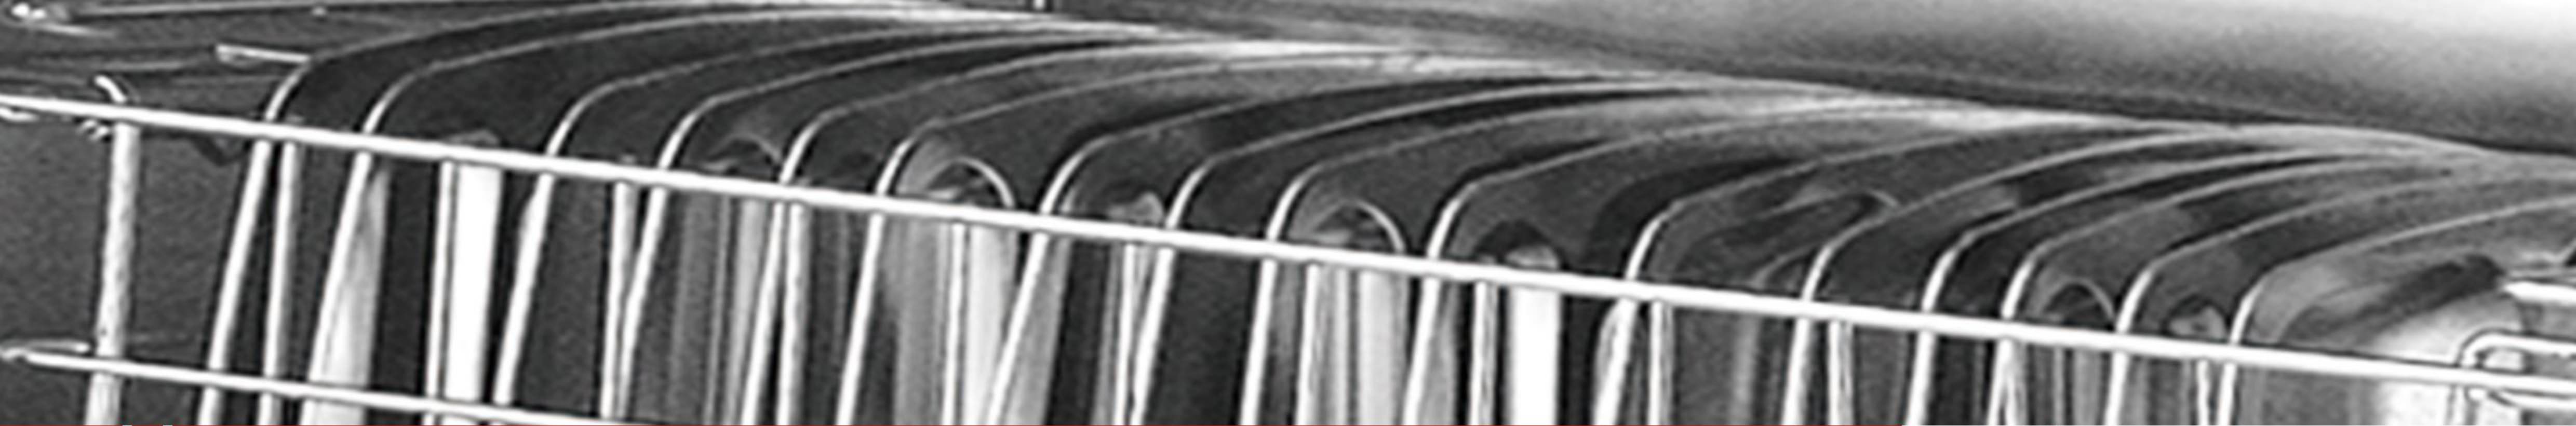

# Disinfection Cabinet Series

Health District

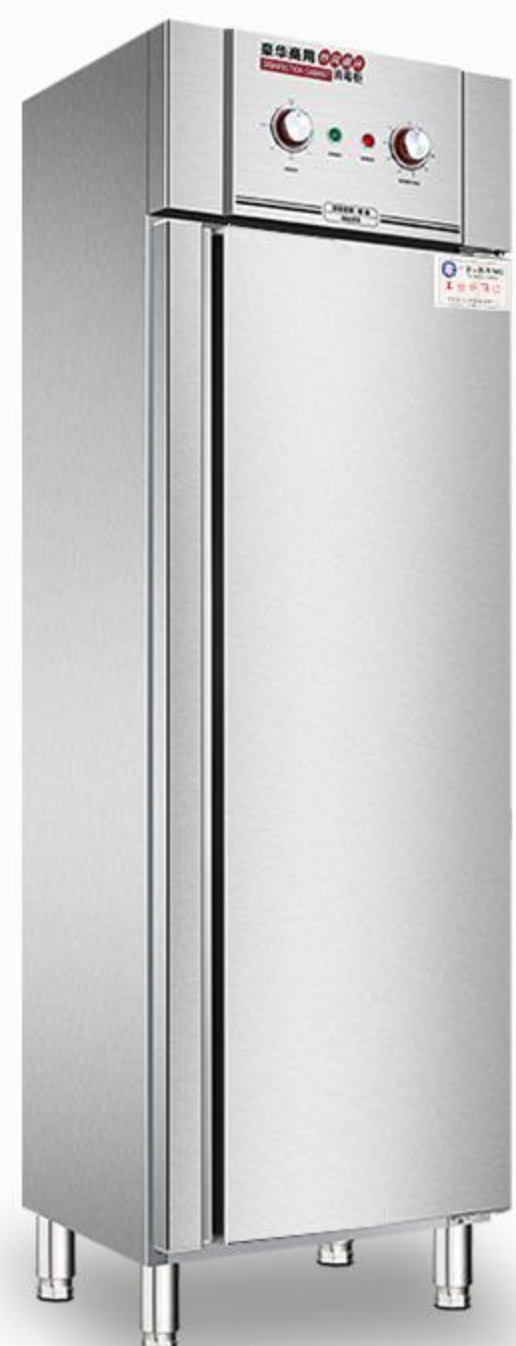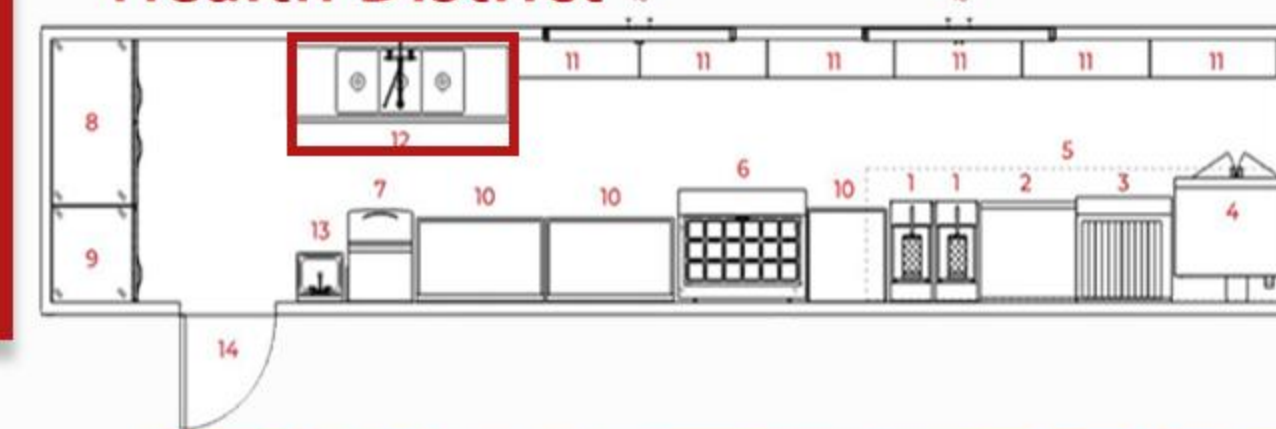

CM-RTP510-510D



CM-RTP880-880A5



CM-RTP1780-1790A6



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial

Model	CM-RTP510-510D	CM-RTP880-880A5	CM-RTP910-910T2	CM-RTP1780-1790A6
Dimension(mm)	575*500*1850	650*650*1990	1160*500*1850	1310*650*1990
Outer Size/Inner Size(LWH)	511*410*1322mm	586*450*1382mm	1022*410*1322mm	1226*450*1382mm
Voltage & Frequency	220V/950W	220V/1850W	220V/1870W	220V/3.5KW
Capacity	310L	400L	620L	650L
Disinfection mode (time)	high temperature + hot air circulation (>15min)	high temperature + hot air circulation (>15min)	high temperature + hot air circulation (>15min)	high temperature + hot air circulation (>15min)
Sterilisation temperature	0-125°C(adjustable)	70/100/125°C	0-125°C(adjustable)	0-125°C(adjustable)
Can put the number of tableware	180 cups,156 bowls,240 plates	all about 180 cups,156 bowls 240 dinner plates	360 cups,312 bowls,480 plates	360 cups,312 bowls,480 plates



Disinfection cabinet is a must to keep Utensils clean for every customer, with UV, Ozone, hot air convection function.





# Smoke Extraction Hood



Exhaust range hood



Island range hood



Fange hood for fryer



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial


Model	CM-ELYZ-1250	CM-YSYZ-1050	CM-YSYZ-1070	CM-YWYZ-1050	CM-DSYZ-1850	CM-XFYZ-1250
Dimension(mm)	L*1200*500	L*1000*500	L*1000*700	L*1000*500	L*1800*500	L*1250*500
	L*1500*500	L*1100*500	L*1200*700	L*1100*500	/	/
	L*1800*500	L*1200*500	L*1300*700	L*1200*500	/	/
Material	201 / 304					
Thicknesses	0.8 - 1.1MM					

A strong hood can cool down the kitchen temperature, especially the purifier one, every fryer, oven, griddle, etc require a hood above it.







# Dishwasher

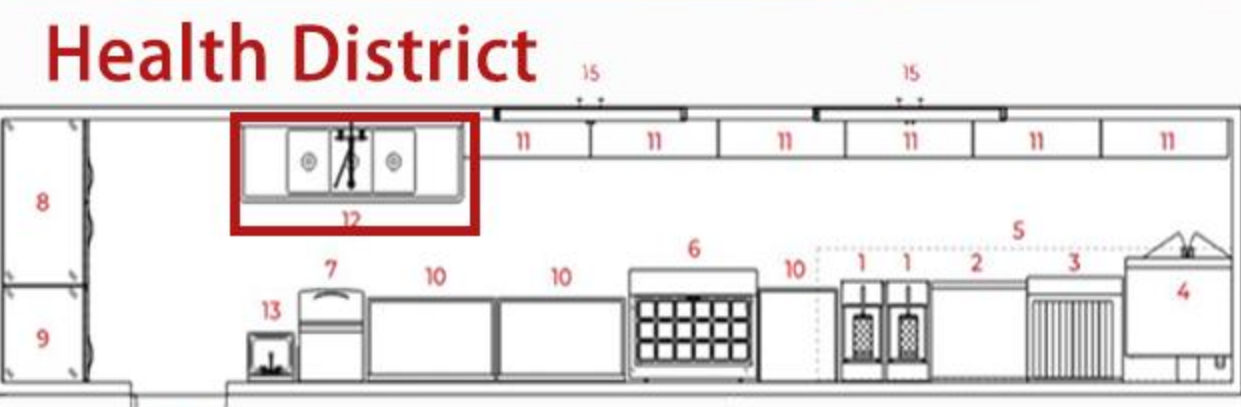

CM-XXA1-JG-QJ



CM-XXA1-GLS20

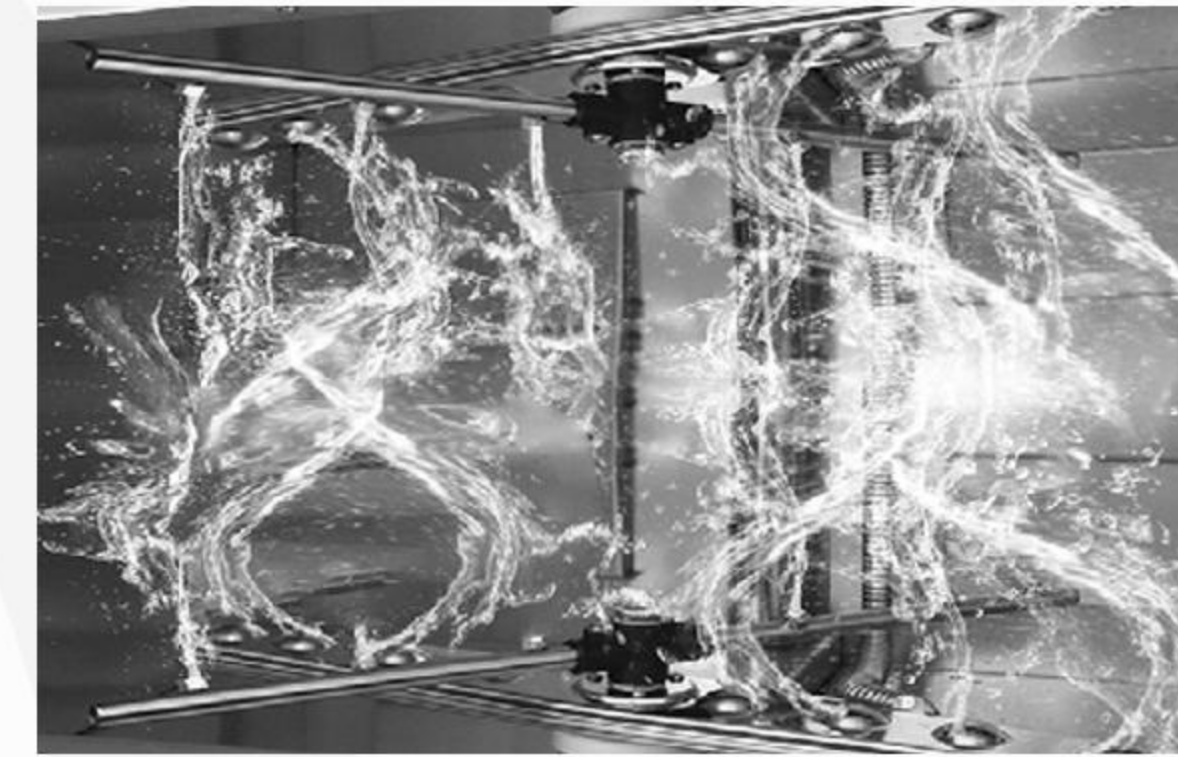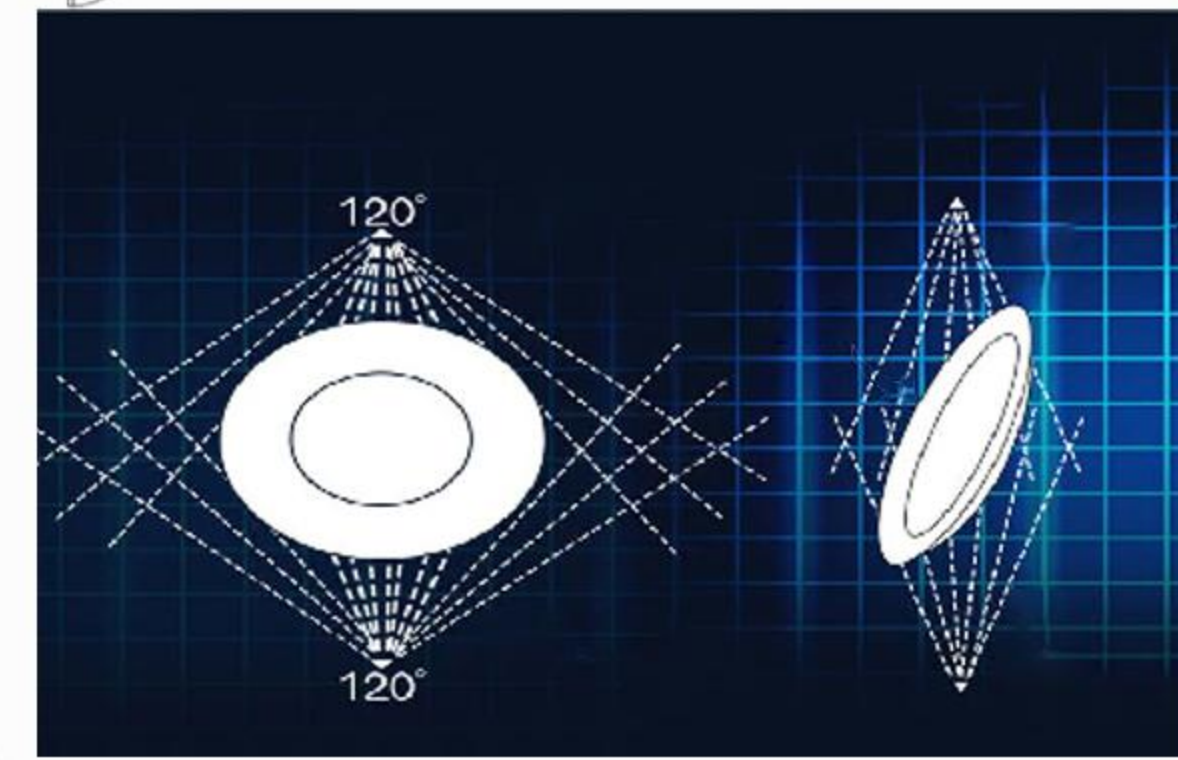

Water and oil resistant



Imported spray bar



Stainless steel heat pipe



Welded one-piece sinks



Imported water pumps

Model	CM-XXA1-JG-QJ	CM-XXA1-GLS20	CM-XXA1-RAE	CM-XXA1-SJG
Dimension(mm)	700*817*1430	715*840*1430	700*817*1430	1315*830*1410
Material	304#+201#	304#	304#	304#
Voltage & Frequency	220v/380v 7kw/9kw	220v/380v 7kw/9kw	220v/380v 7kw/9kw	220V/3.5KW
Tank capacity	28L+18L	26L+15L	28L+18L	68L+48L
Water consumption	3L/B	3L/B	3L/B	6L/B
Cleaning capacity	60B/H	60B/H	60B/H	120B/H



Dishwasher can clean plates, glass, utensils thoroughly with high temperature, efficient and labor saving.



# Drinks Machine Series



0SCD2-218A2S



CM-SCD2-218A3S



CM-2000E-1



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial

Model	CM-SCD2-218A2S	CM-SCD2-218A3S	CM-SCD2-218A4S	CM-SCD2-218A4S	CM-SCD2-218B4S	CM-SCD2-218B5S
Dimension(mm)	700*350*770	700*350*770	700*350*770	700*350*770	700*350*770	700*500*770
Material	electrostatic spraying	electrostatic spraying	electrostatic spraying	electrostatic spraying	electrostatic spraying	electrostatic spraying
Voltage & Frequency	220v50hz 500w	220v50hz 500w	220v50hz 500w	220v50hz 500w	220v50hz 500w	220v50hz 500w
Refill capacity (hours)	90cups/h	90cups/h	90cups/h	120cups/h	120cups/h	120cups/h
Condenser material	copper	copper	copper	copper	copper	copper
Cooling temperature	0-3°C	0-3°C	0-3°C	0-3°C	0-3°C	0-3°C
Outlet	2	3	4	3	4	5




Beverage machine is easy for customers to get different drinks fresh and cool.





# Meat Marinating Machine

Preparation Area

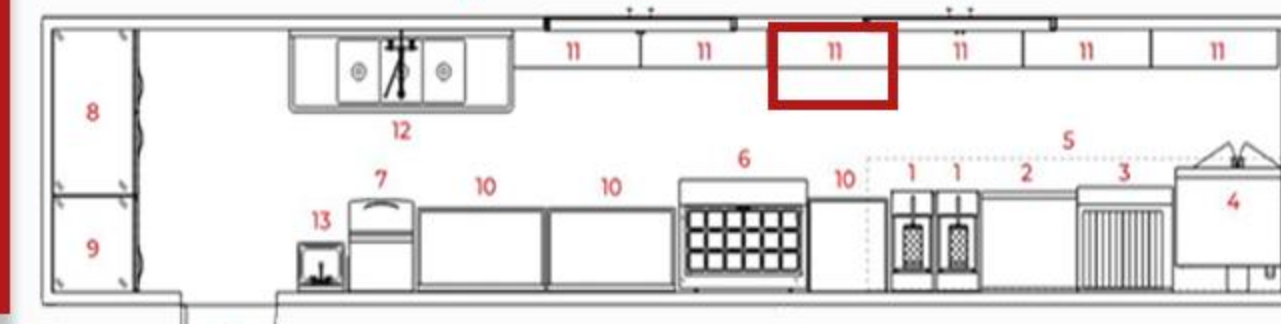

CM-YPC-15B



CM-YPC-1A-B



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial

Model	CM-YPC-2D-B	CM-YPC-4A-B	CM-YPC-1A-B	CM-YPC-6A-B	CM-YPC-8A-B	CM-YPC-15A-B
Dimension(mm)	610*315*370	750*410*830	860*460*935	880*490*950	955*540*1000	1115*600*1150
Material	201#1.5mm	201#1.5mm	201#1.5mm	201#1.5mm	201#1.5mm	201#1.5mm
Voltage & Frequency	30W 220V/50Hz	240W 220V/50Hz	240W 220V/50Hz	330W 220V/50Hz	350W 220V/50Hz	900W 220V/50Hz
Control mode	speed control	PC control	PC control	PC control	speed control	PC control
Roller capacity	18L	38L	45L	60L	80L	150L
Vacuum function	√	√	√	√	√	√
Drum size(mm)	300*250*325	380*340*328	380*340*375	445*412*406	475*440*475	600*580*602




Meat Vacuum Marinator can maximize the freshness and taste of meat, efficient and time saving, preserve the meat longer.





# Sauce Warming Series

Preparation Area

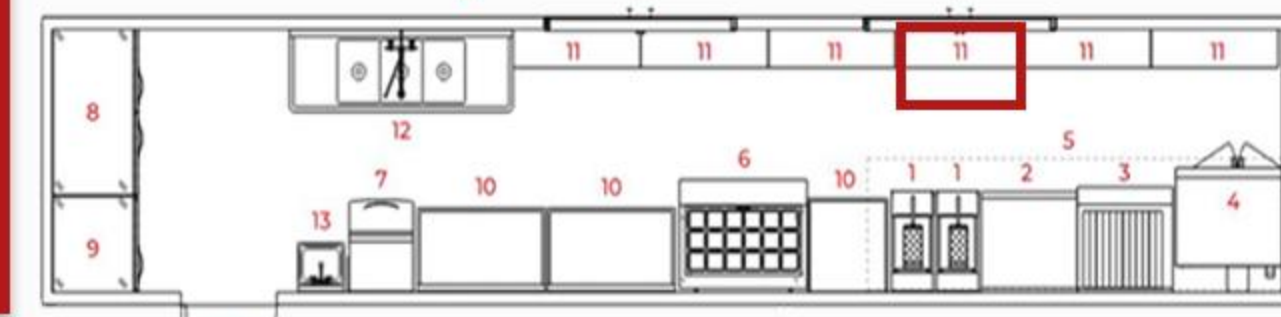

CM-FZ-022A



CM-FZ-023A



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial

Model	CM-FZ-021A	CM-FZ-022A	CM-FZ-023A	CM-FZ-024A
Materia	stainless steel	stainless steel	stainless steel	stainless steel
Control	mechanical	mechanical	mechanical	mechanical
Capacity	1x32 oz (1000ml)	2x32 oz (2000ml)	3x32 oz (3000ml)	4x32 oz (4000ml)
Temperature	40-90°C/105-195°F	40-90°C/105-195°F	40-90°C/105-195°F	40-90°C/105-195°F
Specification	200W/120V-240V	400W/120V-240V	600W/120V-240V	800W/120V-240V
Product Size	162x220x205mm	270x220x205mm	400x220x205mm	530x220x205mm




Sauces warmer is used frequently to keep Ketchup, Cheese fresh and tasted.





# Oil filter

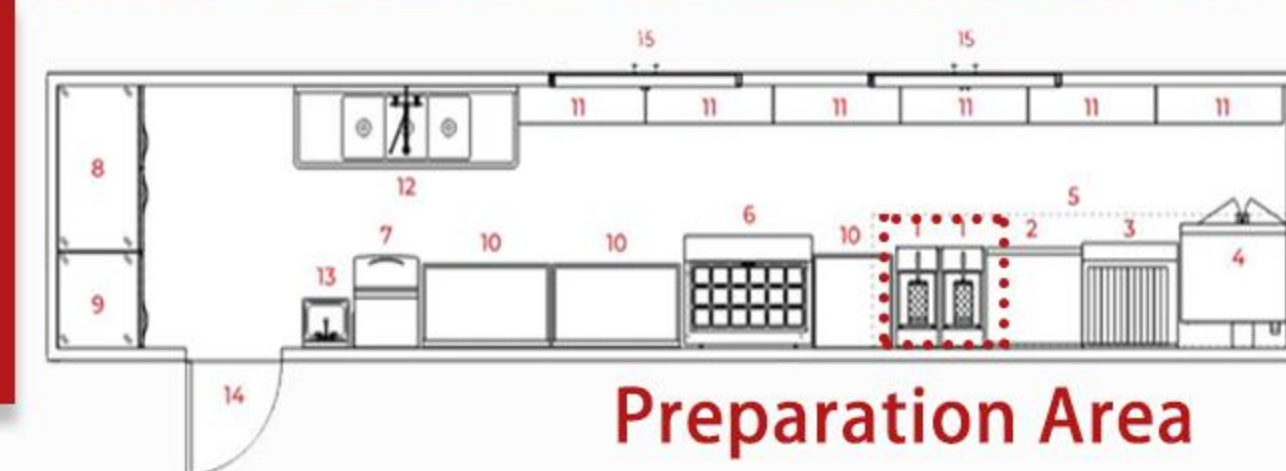

CM-LYC-01



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial


Model	CM-LYC-01	CM-LYC-02	CM-LYC-03
Dimension(mm)	850*415*615	905*380*590	890*420*360
Recommended oil loading	48L	36L	48L
Oil pump flow	32L/MIN	32L/MIN	12L/MIN
Cylinder size(mm)	390*708*232	390*708*232	382*280mm
Motor power	3/4 HP	3/4 HP	1/2 HP
Matching oil filter paper bag size	440*345mm	400*360mm	382*280mm
Filter density	20um	20um	20um



1. The oil can be reused after filtered, save the cost and make its lifetime longer.  
 2. Filter the residue of oil and improve the taste of fried food.



# Grease Trap

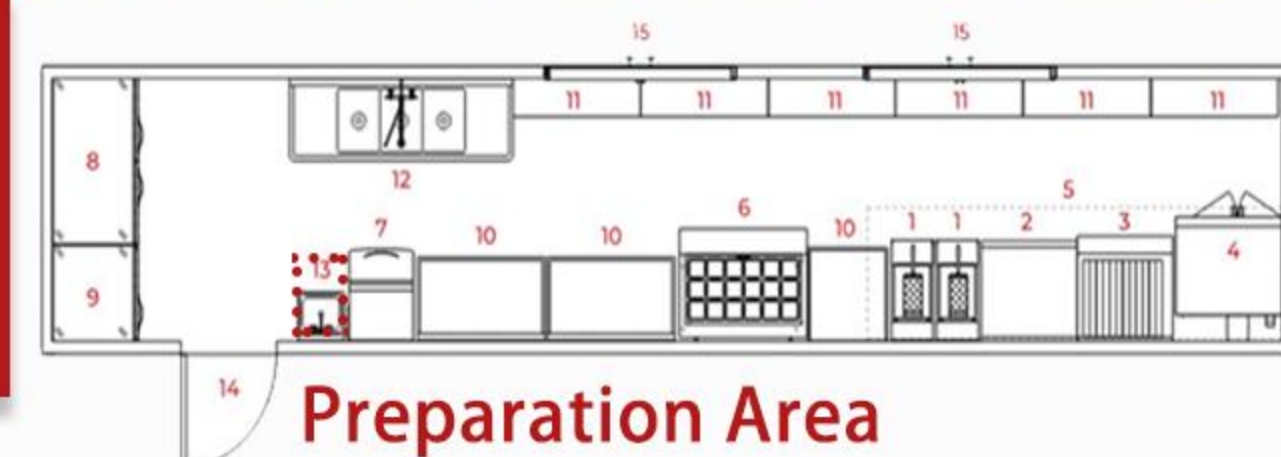

CM-W528-01



Water and oil resistant



Thickened material



Heat-resistant



Easy cleaning



Powerful antibacterial


Model	CM-W528-01	CM-W528-01	CM-W528-03	CM-W528-04
Dimension(mm)	400*300*300	600*400*300	800*600*850	1000*600*850
Material	201/304 stainless steels	201/304 stainless steels	201/304 stainless steels	201/304 stainless steels
Thickness	0.8-1.5mm	0.8-1.5mm	0.8-1.5mm	0.8-1.5mm



1. Oil-water separated, effective filtration of residual oil and grease before drainage.
2. Essential for commercial kitchen to keep all drainage water clean.



# Fast Food Utensil

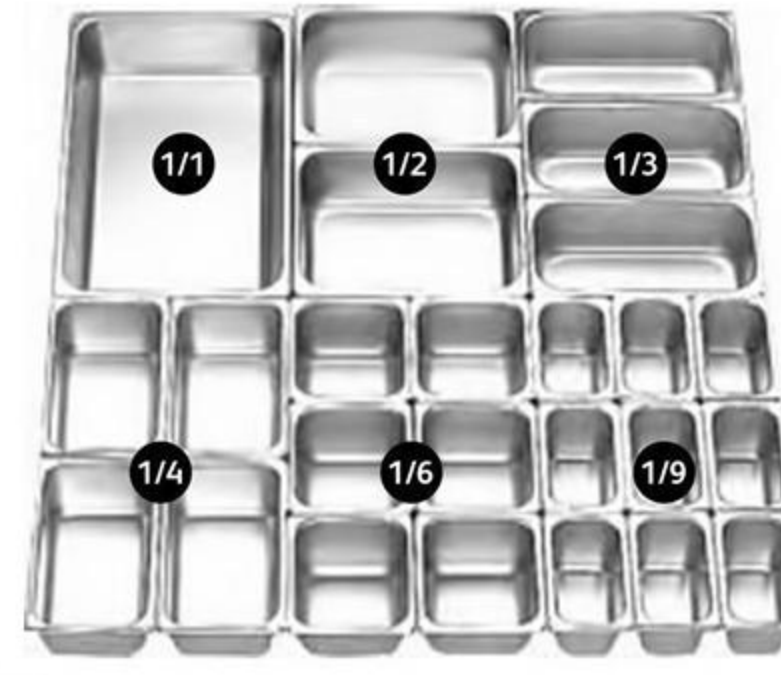





# CUSTOMER CASE





We value this opportunity to showcase our company to you.  
Please feel free to contact us should you have any enquiry.



 180028585238

 [sales@chefmaxequipment.com](mailto:sales@chefmaxequipment.com)

 <https://chefmaxequipment.com/>

 Dipper Building, No. 7-4 Jinjie Road. Humen Town, Dongguan Guangdong, China